

APPRO®



LC-6740B

720P / H.264



 **Plug & Play**

Wi-Fi

Compact Dome Wi-Fi IP Camera

 **H.264**

 **two-way**

 **Motion**

 **SDXC**

 **ONVIF**

User Manual

Before trying to connect or operate this product, please read this manual completely.

Table Of Contents

1	PRODUCT FEATURES	4
	PRODUCT INSTRUCTIONS	4
	PRODUCT FEATURES	4
2	DESCRIPTION OF THE SURFACE	5
	THE HARDWARE VIEW	5
	How to install an SD card?	7
	THE RESET BUTTON	7
3	INSTALLATION	8
	HARDWARE INSTALLATION	8
	WPS - PUSH BUTTON SETUP	8
	SOFTWARE INSTALLATION	9
	Where to download	9
	Configuration—Android Operating System	10
	Configuration—iOS Operating System	14
	MOUNTING AND POSITIONING THE COMPACT DOME	18
	Camera Positioning	20
	UPDATING SYSTEM SOFTWARE	21
4	Network Configuration	22
	CABLE CONNECTIONS	22
	CONFIGURE YOUR IP CAMERA NETWORK SETTINGS	22
	Set IP Address	22
	TCP/IP COMMUNICATION SOFTWARE	24
	TCP/IP INSTALLATION	26
	TCP/IP CONFIGURATION SETTING	27
	CONNECTION TESTING	28

Table of Contents

1	PRODUCT FEATURES	4
	PRODUCT INSTRUCTIONS	4
	PRODUCT FEATURES	4
2	DESCRIPTION OF THE SURFACE	5
	THE HARDWARE VIEW	5
	How to install an SD card?	7
	THE RESET BUTTON	7
3	INSTALLATION	8
	HARDWARE INSTALLATION	8
	WPS - PUSH BUTTON SETUP	8
	SOFTWARE INSTALLATION	9
	Where to download	9
	Configuration—Android Operating System	10
	Configuration—iOS Operating System	14
	MOUNTING AND POSITIONING THE COMPACT DOME	18
	Camera Positioning	20
	UPDATING SYSTEM SOFTWARE	21
4	Network Configuration	22
	CABLE CONNECTIONS	22
	CONFIGURE YOUR IP CAMERA NETWORK SETTINGS	22
	Set IP Address	22
	TCP/IP COMMUNICATION SOFTWARE	24
	TCP/IP INSTALLATION	26
	TCP/IP CONFIGURATION SETTING	27
	CONNECTION TESTING	28

5	Configuration Using A Web Browser	31
	WEB CONFIGURATION PAGES	32
	Connecting the IP camera	32
	Live Video.....	34
	Setup.....	36
6	FREQUENTLY ASKED QUESTIONS.....	90
7	SPECIFICATIONS	93
	Appendix: The Playback Utility Tool-- CMS.....	95
	INTRODUCTION TO THE CMS	95
	INSTALL THE CMS IN YOUR PC	95
	START TO USE THE CMS	96
	OPERATION	98
	Live View	98
	Playback	100
	Settings.....	101

SAFETY PRECAUTIONS

All the following safety and operational instructions to prevent harm or injury to the operator(s) or other persons should be read carefully before the unit is activated.

WARNING

- To prevent fire or shock hazard, avoid exposing this unit to rain or moisture.
- Do not block ventilation openings.
- Do not place anything on top of the unit that might spill or fall into it.
- Do not attempt to service this unit yourself, as opening or removing covers may expose you to dangerous voltage or other hazards. Please refer all servicing to your distributor/ retailer.
- Do not use liquid cleaners or aerosols for cleaning.
- To prevent fire or electric shock, do not overload wall outlets or extension cords.
- Please only select a power adapter or power certified by UL and marked at 24Vac / 60 Hz, minimum 1A, class 2 or LPS.

CAUTION

Risk of explosion if battery is replaced by an incorrect type. Dispose of used batteries according to the instructions.

1 PRODUCT FEATURES

Product Instructions

Here's a new series from us -- cameras that act as basic watchguards in your premises -- lightweight, simple formatted, inexpensive, and no fuss to install.

These watchkeepers are the ideal stuff for the safety of your home and office interiors.

Our compact dome camera LC-6740 brings you dependable video surveillance in a focused & targetted environment.

The dynamically effective sensor has a resolution of 720P. Our compact dome camera comes with a Fixed Focal Board Lens f:3.6mm/ F1.8 ranging over a spectrum of indoor and outdoor applications. It's your genuine plug n play device with easily adjusted settings.

Smooth to configure and operate, our camera comes with the Universal Plug -n -Play feature which gets computers running on Windows XP / Vista / 7 to automatically recognize the camera and add it to the network.

The compact dome camera offers support for Power over Ethernet (PoE), so you can put the device in places which have no power outlets close by.

In addition it provides an intelligent web based interface, remote monitoring, and motion detection for comprehensive and affordable residence -cum -office security and safety.

Its wireless capability means you can site your camera in any place within range of your wireless network. In addition it provides an intelligent web based interface, remote monitoring, and motion detection for comprehensive and affordable residence -cum -office security and safety.


Product Features

- Simultaneous H.264 and MJPEG video compressions.
- Multi-profile applications: Selectable resolutions, frame rates, video qualities, and compression.
- Advanced motion detection (512 zones, sensitivity: 0~100 %).
- Supports ONVIF.
- Supports Wi-Fi.

2 DESCRIPTION OF THE SURFACE


The Hardware View

Camera (the external view).

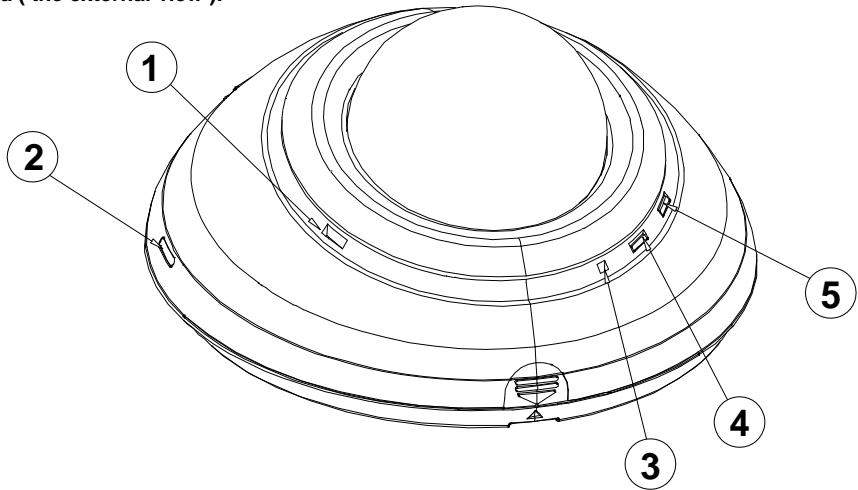

1. **Speaker:** Connector is used to connect the audio output from other devices to the camera.
2. **WPS button** (for the Wi-Fi model only).
3. **Microphone:** The built-in microphone records audio of the surrounding area.
4. **LED indicator:** The Power and network indicator.
5. **LED indicator:** The WPS indicator (for the Wi-Fi model only).

The component parts (the internal view).

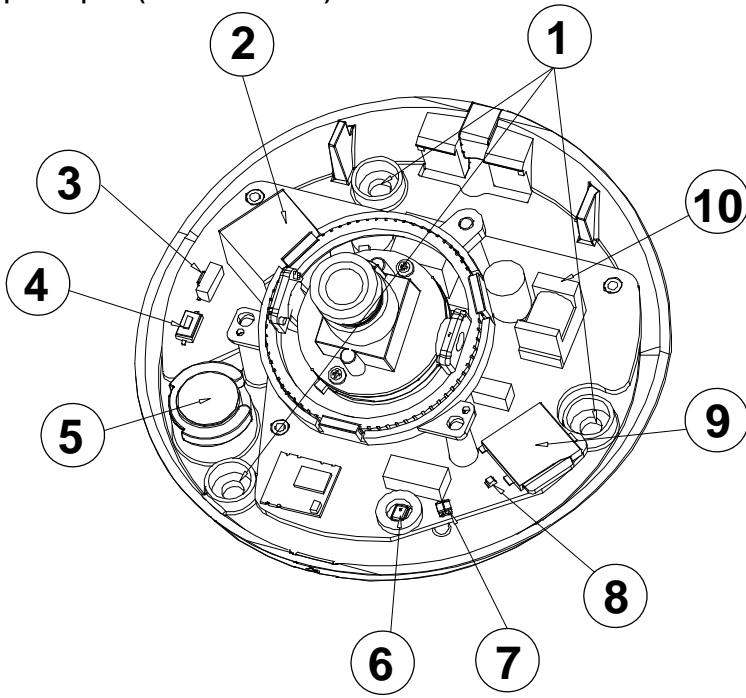

1. **Screw holes:** Guide to assist correct casing alignment with the cable channel.
2. **ETHERNET 10/100 Connector:** This is a standard RJ-45 connector for 10/100 Mbps Ethernet networks. PoE (Power over Ethernet) function: Provides power to the device via the same cable as used for the network connection.
3. **WPS button** (for the Wi-Fi model only).
4. **Reset button:** Recover to factory default.
5. **Speaker:** Connector is used to connect the audio output from other devices to the camera.
6. **Microphone:** The built-in microphone records audio of the surrounding area.
7. **LED indicator:** The Power and network indicator.
8. **LED indicator:** The WPS indicator (for the Wi-Fi model only).
9. **Micro SD CARD slot:** Insert a Micro SD card for Local storage for storing recorded image and video. This is used for updating system software and archiving / accessing critical images.
10. **DC-in:** Connects to 12V DC power.

How to install an SD card?


Step 1: Place the camera face down on a non-slip flat surface.

Step 2: Open the camera enclosure. Lift the dome off the base of the camera.

Step 3: Push the SD card into the camera with the gold contacts oriented towards the base of the camera. To eject the SD card, push the SD card into the slot.

Step 4: Replace the dome enclosure ensuring a tight fit.

NOTE: To ensure that the camera stays weatherproof, users are advised to ensure that the weatherproof sheath is secured firmly in place.

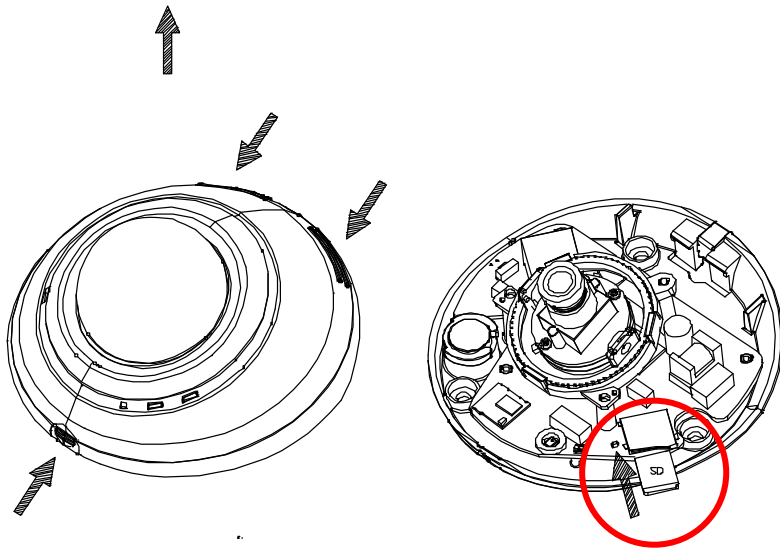

The Reset Button

You can use the **Reset** button to reset the camera operations back to default. Press the Reset button for about **10** seconds. Blue screens of the analog output are displayed, and a text saying **RESETTING...** appears.

3 INSTALLATION

Please follow the instructions and the diagram below to set up the system.


Hardware Installation

1. Connect Ethernet cable to the rear panel of the camera.
2. Plug in the power connection to the camera.
3. Confirm the correct network connection status.

WPS - Push Button Setup

To create a WPS connection:

1. Press and hold the WPS button for about 5~6 seconds. The WPS status LED will flash.
2. Press the WPS button on your router within 60 seconds. The camera will automatically create a wireless connection to your router. While connecting, the status LED will flash. After the connection process is complete, the status LED will turn solid.



Note

Please make sure that your router supports WPS, then you can use the WPS button on the camera to easily create a secure wireless connection to your network.

On some routers, you may need to log in to the web interface and click on an on-screen button to activate the WPS feature.

Software Installation

Before installing the apps to your mobile phone for remote surveillance, make sure that you have checked the following:

1. Your mobile platform is iOS or Android.
2. You might be charged for Internet access via wireless or 3G/4G networks. For the Internet access rate details, please check with your local network operator or service provider.
3. Your IP camera is powered on and connected to Internet/ Intranet.

Where to download

App for Android

QR-code



App for iOS

QR-code




Configuration—Android Operating System

Browse to where **AppPro** is installed by default on your mobile phone when the installation is completed. Find **AppPro** and activate it.




Two methods to add a new camera.

1. **Scan QR code of the camera:** You can just scan the QR code to add a camera. Select "+" (Add) on the screen to add the new camera.
2. **Manually type in the camera ID and password:** Enter the information needed to access your device, such as the DeviceID and Password (default:9999). Select "+" (Add) on the screen to add the new camera.

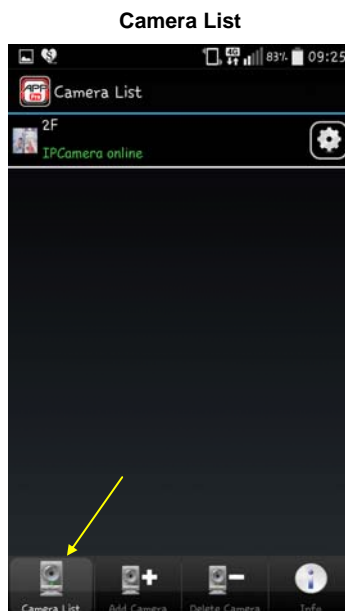

Start to monitor.

1. Choose the camera you want to access on the camera list. Your mobile phone will start connecting to your camera.
2. Select the  to enter the camera configuration setting page.






Change the settings of resolution, video mode, video area, FPS, audio mode and enable/disable Reverse Image function. Then click ✓.




You can change the Password here. Click Yes to activate it. Please use the new password to connect the camera by using this app next time.

Configuration- Notification Setup

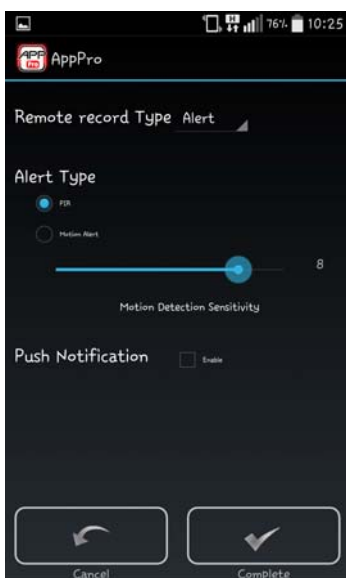

Please set the SD card Remote Record Type, Alert Type, Sensibility, and the Push Notification functions first. Then click ✓.

Configuration- Local Storage

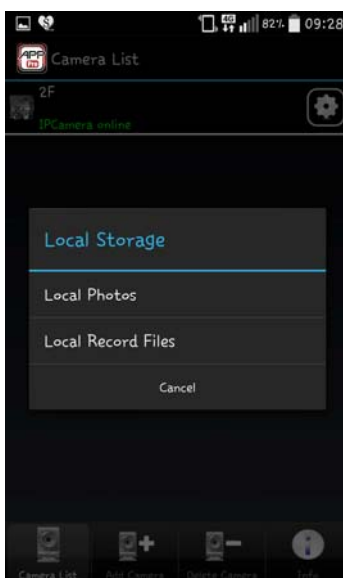

You can view the saved video clips and images in your mobile device here.


Configuration- Remote Storage (SD card)



You can view/ download the saved video clips and images in the SD card here.


Note: Please insert an SD Card to the camera first.

Remote Storage- Downloaded Files

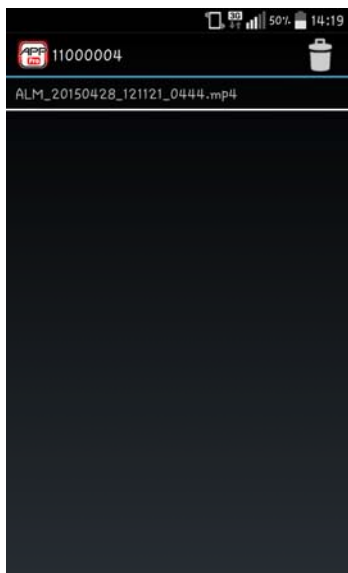

You can manage the exported SD card video clips to your mobile device here.

Remote Storage- Normal/ Alert Record List

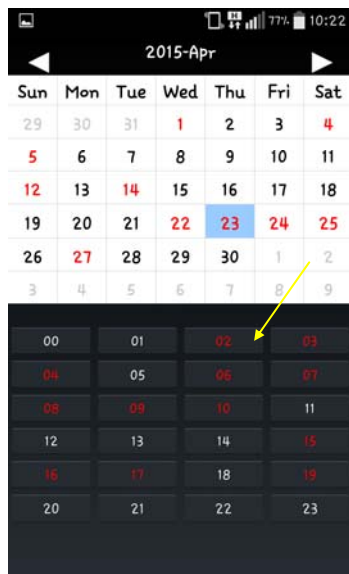


This allows you to search a recorded video stored in the SD card of the camera. Click the date and press the hour button to proceed.

Delete Camera




Select and click Delete to remove the camera on the list.

Info

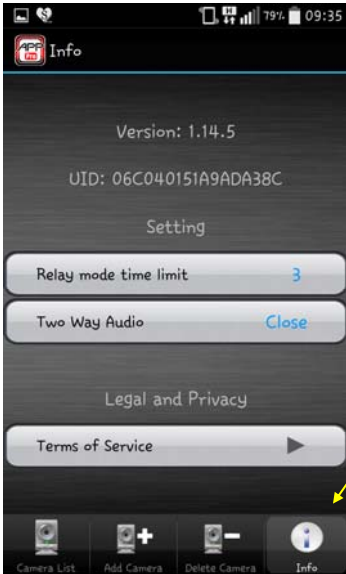





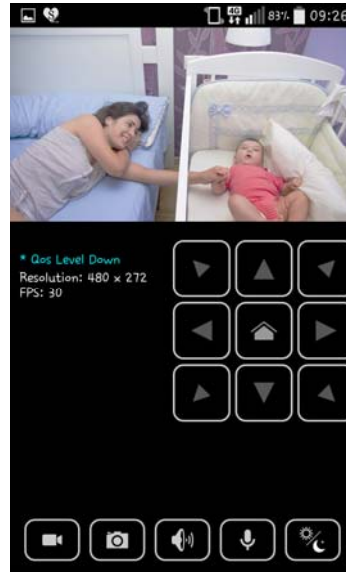


Set the Video time limit from 1, 3 and 5.
Enable/disable 2-way audio function.


Live




Live- the icons

- Click on  to record a video clip.
- Click on  to take a snapshot.
- Click on  to start/stop audio out.
- Click on  to start/stop two-way audio.
- Click to select the Day & Night mode from:  (Auto mode),  (Night mode) and  (Day mode).



-  The ePTZ control panel. Click to control the camera's directions.

Live- Screen Orientation

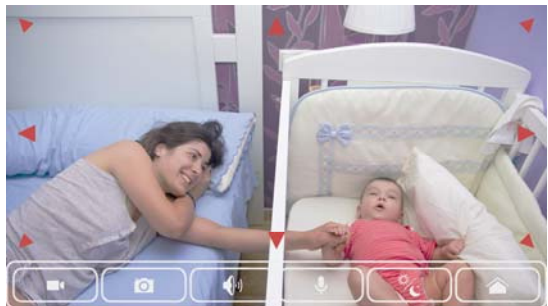






Mobile devices generally offer two screen orientations: portrait and landscape. Users can simply rotate the device to initiate a change from one orientation to another. And the functions of the icons are the same with they described above.


Configuration—iOS Operating System

Browse to where **AppPro** is installed by default on your mobile phone when the installation is completed. Find **AppPro** and activate it.





Two methods to add a new camera.

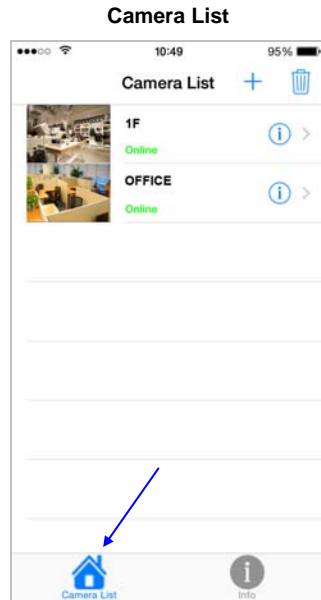

1. **Scan QR code of the camera** : You can just scan the QR code to add a camera. Select “” (OK) on the screen to add the new camera or click on “” to cancel.
2. **Manually type in the camera ID and password**: Enter the information needed to access your device, such as the DeviceID and Password (9999). Select “” (OK) on the screen to add the new camera or click on “” to cancel.



Start to monitor.


1. Choose the camera you want to access on the camera list. Your mobile phone will start connecting to your camera.
2. Select the  to enter the camera function setting page.




3. You can click on the “” icon to add a new camera or select “” to delete a chosen camera.

Camera Functions- Revise Password



You can change the Device ID and Password here. Select “” on the screen to activate it.

Camera Functions- Local Storage

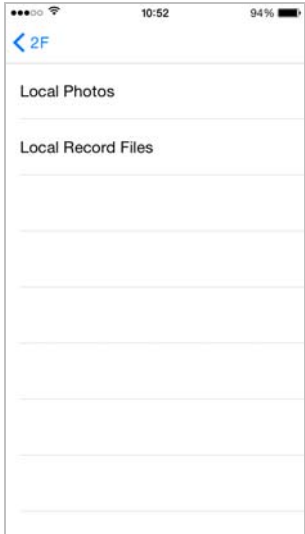

You can view the saved video clips and images in your mobile device here.

Camera Functions- Camera Settings



Change the settings of resolution, video mode, video area and FPS. Then click Save.

Camera Functions- Notification Setup




When push notification is enabled, the user can receive a push message on their device whenever motion is detected. Please set the SD card remote Recording mode, Alert Type, Sensibility, and the Push Notification functions first. Then click **Save**.

Camera Functions- Notification Events



This page shows the event list of your camera.


Camera Functions- Remote Storage (SD card)

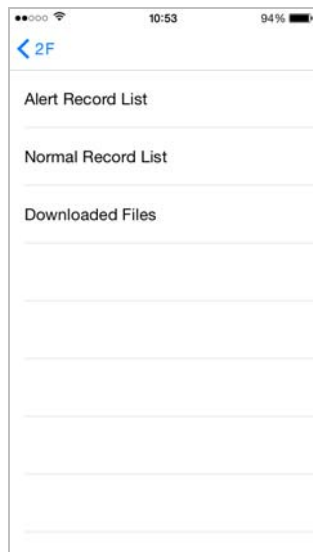

You can view/ download the saved video clips and images in the SD card here.


Note: Please insert an SD Card to the camera first.

Remote Storage- Normal/ Alert Record List

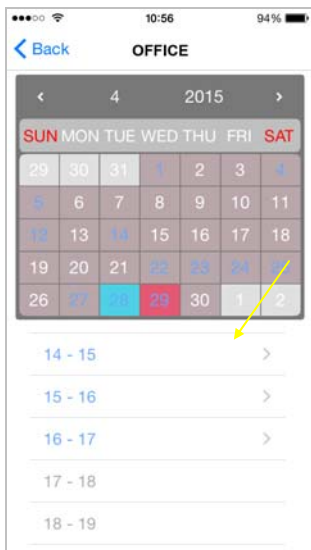

This allows you to search a recorded video stored in the SD card of the camera. Click the date and press the hour button to proceed.

Remote Storage- Downloaded Files

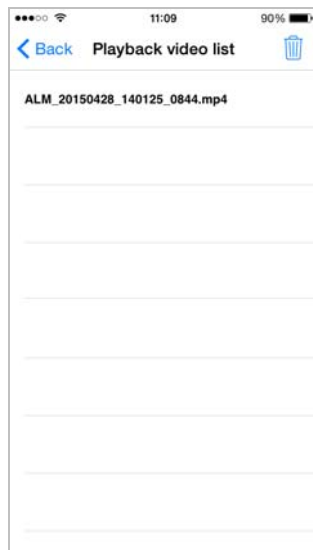

You can manage the exported SD card video clips in your mobile device here.

Live










Live- Screen Orientation



Mobile devices generally offer two screen orientations: portrait and landscape. Users can simply rotate the device to initiate a change from one orientation to another. And the functions of the icons are the same with they described above.

Live- the icons


The function of icons:

- Click  to record a video clip.
- Click  to start/stop audio out function.
- Click  to start/stop two-way audio.
- Click  to take a snapshot.
- Click to select the Day & Night mode from:
 -  (Auto mode),  (Night mode) and
 -  (Day mode).



The ePTZ control panel. Click to control the camera's directions.

Info

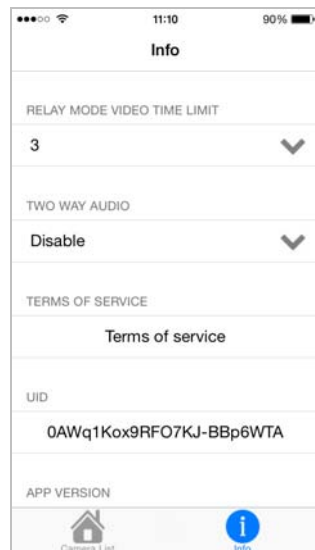

Set the Video time limit from 1, 3 and 5.
Enable/disable 2-way audio function.

Mounting and Positioning the Compact dome

Camera Mounting:

(refer to Figure3.2.1~3.2.6)

Step 1

Position the alignment sticker in the desired location for the camera.

Step 2

Use a 6mm drill bit to make required holes approximately 25mm deep.

Step 3

Insert wall anchors.

Step 4

Affix the camera base using the screws provided.

Step 5

Adjust the Lens.

Step 6

Affix the dome using the screws provided.

Step 7

Insert the weatherproof rubber screw coverings over the screws ensuring a tight seal.

Step 8

Using the Ethernet cable connect to the Ethernet port. Connect the other end of the Ethernet cable your network. If you are using a PoE hub, connect the IP camera to the hub via an Ethernet cable, which will provide transmission of both power and data over a single cable.

Step 9

Connection with 12V DC Power Adaptor.

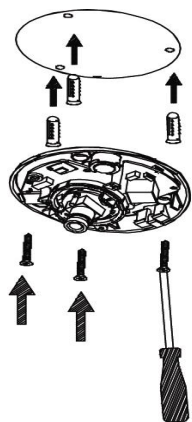


Figure 3.2.1




Figure 3.2.2

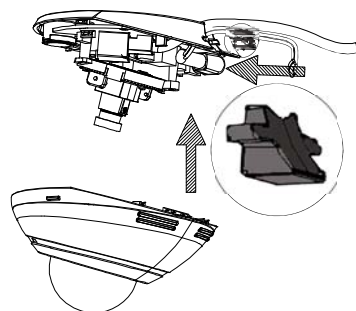


Figure 3.2.3

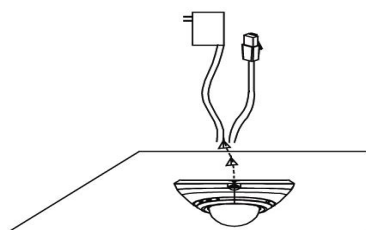


Figure 3.2.4





Figure 3.2.5



Figure 3.2.6

Camera Positioning

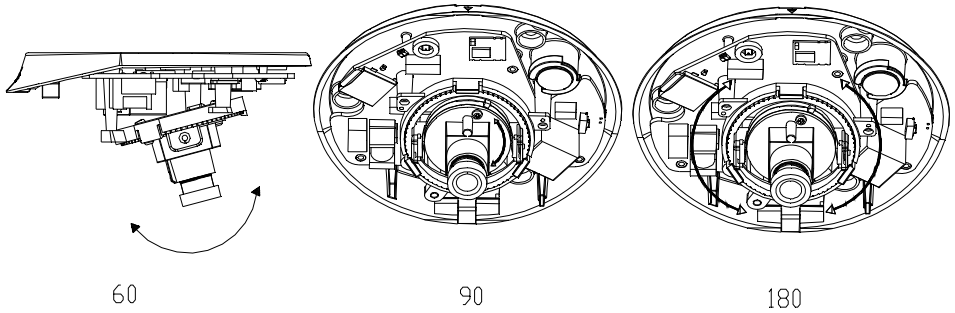

Step 1

Place the camera on a non-slip surface.

Step 2

Remove the cover.

Step 3

Adjust the Viewing Angle of the 3-axis Mechanism by turning the lens module left and right until the desired position is achieved.

Step 4

Turn the lens up and down until the desired position is achieved.

Step 5

Turn the lens to adjust the IP camera's image until the desired orientation is achieved.

Step 6

Seat the cover.

Step 7

Insert the weatherproof rubber screw coverings over the screws ensuring a tight seal.

Updating System Software

If the system software of the IP Camera needs to be upgraded, please take the following steps to safely process it.

Important: Before carrying out the following procedures, please ensure the SD card is working and the file of the system firmware is intact

1. Create a directory named **UPGRADE** (upper-case or lower-case letters are no difference) in the SD card if it does not exist.
2. Copy the file of UPDATE.BIN to the **UPGRADE** -directory.
3. If the IP Camera is running, please power it off first.
4. Insert the SD CARD into the IP Camera.
5. Remove the Ethernet cable from the RJ-45 port and then power on the IP Camera.
6. In 5 to 10 seconds, a message reading "UPDATE PROCESSING" will show up on the screen on a blue background; if not, please check out steps 1 to 6 carefully or else inform your technical support while ignoring the following steps.
7. DO NOT power off the IP Camera while this update process is running until the message "UPDATE OK RESET PLEASE" appears on the screen; it might take 15 to 30 seconds to appear.
8. If the message "UPDATE NG RESET PLEASE" appears rather than "UPDATE OK RESET PLEASE", please write down the error messages shown on the screen and inform your technical support, while ignoring the following steps.
9. Power off the IP Camera when this update process is finished, then remove the SD card from the IP Camera.
10. Reconnect the Ethernet cable to the RJ-45 port if necessary.
11. Power ON the IP Camera and it will work normally if the entire update procedure goes correctly.
12. Verify the version of the system software.

WARNING:

- You must perform Steps 1 to 2 on a PC.
- Ensure you are using the correct UPDATE.BIN file in Step 2, otherwise the IP Camera will not work properly.
- If the power of the IP Camera is suddenly lost in step 7, please remove the SD card first and turn on the IP Camera next to test its operation. If the IP Camera remains working normally, please go back to step 3; otherwise, please inform your technical support.
- In step 9, if the SD card is not removed and the IP Camera does not get online as well, the updating process must be repeated again after rebooting the IP Camera.
- Make sure that the SD card is inserted in a correct position in step 4, or the IP Camera will suffer permanent physical damage.
- If the message "CSUM ERROR" appears in step 7, it implies a problem in the file of UPDATE.BIN.
- Do not interrupt the process when the unit is updating, or it will crash.

4 Network Configuration

Cable Connections

Please follow the instructions below to connect your IP camera to a computer or a network and to choose a proper RJ-45 cable configuration for connections.

Physical specifications of the RJ-45 cable for Ethernet

Wire Type	Cat. 5
Connector Type	RJ-45
Max. Cable Length	100 m
Hub Wiring Configuration	Straight Through
PC Wiring Configuration	Straight Through

Configure Your IP Camera Network Settings

Upon connecting with the network hardware, you need to activate the network function and configure the proper network settings of the IP camera.

Set IP Address

You need to set an IP address for the unit if the LAN unit isn't connected to a DHCP server. Otherwise, please follow the instructions given below:

Note: The default static IP is **192.168.1.168**.

Set the **IP**, **MASK** and **GATEWAY**. The following is a sample setting.

IP: 192.168.1.X
MASK: 255.255.255.0
GATEWAY: 0.0.0.0

Note

When only one IP camera is connected to a computer or LAN, you can freely assign an IP address for the IP camera. For example only, there is a range of IP camera's IP address from 192.168.1.1 to 192.168.1.254. When using IP ranges on a dedicated security link, you can use almost any IP if configured correctly, however, if using your corporate Network, please consult your IT Department before assigning any IPs.

When an IP camera is connected to a WAN, you must acquire a unique, permanent IP address and correctly configure the MASK and GATEWAY settings according to your network architecture. If you have any questions regarding those settings, please consult a qualified MIS professional or your ISP.

Note

When connecting to a network, each connected IP camera must be assigned a unique IP, which must be in the same class type as your network address. IP addresses are written as four sets of numbers separated by periods; for example, 192.168.1.1. Therefore, if the connected network is identified as Class C, for example, the first three sets of numbers of the IP camera IP address must be the same as the network address. If the connected network is identified as Class B, the first two sets of numbers of the IP camera IP address must be the same as the network address. If you have any questions regarding these settings, please consult a qualified MIS professional or your ISP.


TCP/IP Communication Software

Follow the procedure below to install the TCP/IP communication program in your computer.


1. Click **Start**, and then click **Control Panel**.




2. Double click the **Network Connections** icon to enter the windows.

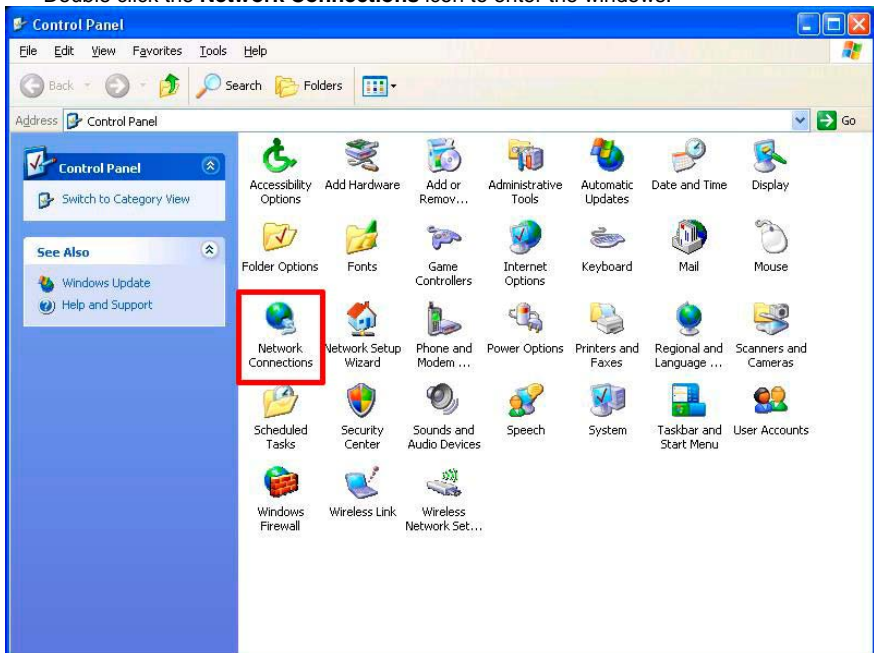

1. Right-click your network connection and then click **Properties**.

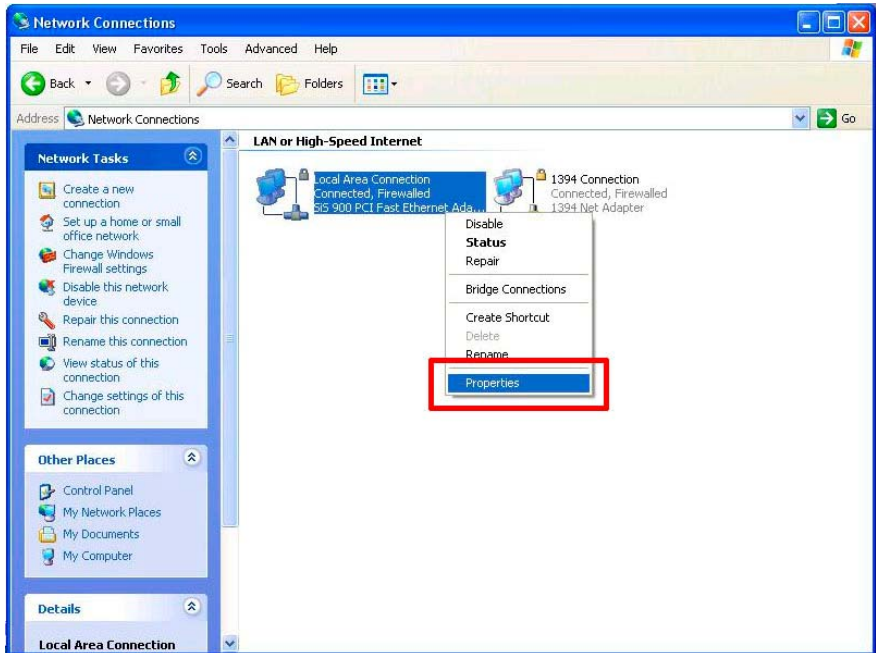


2. On the **General** tab, check if the Internet Protocol (TCP/IP) is included in the list. If the TCP/IP is included, please process section 4.5. If it is not included, please follow section 4.4 to install the TCP/IP.

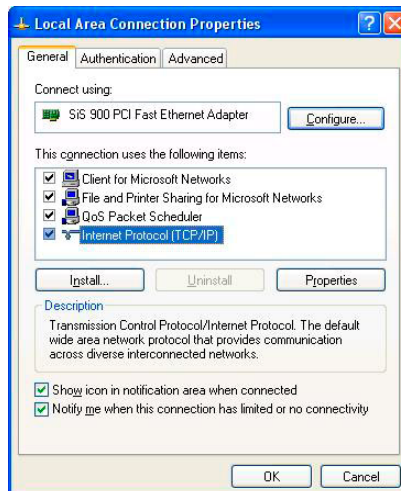

TCP/IP Installation

On the **General** tab of the Connection Properties, under "This connection uses the following items", click **Internet Protocol (TCP/IP)**. Then click **Install**. Select **Protocol** from the network component type then click **Add**. Select **Microsoft TCP/IP** from the network protocol then click **OK**. Click **Close** to return to the **Network Connections** window.


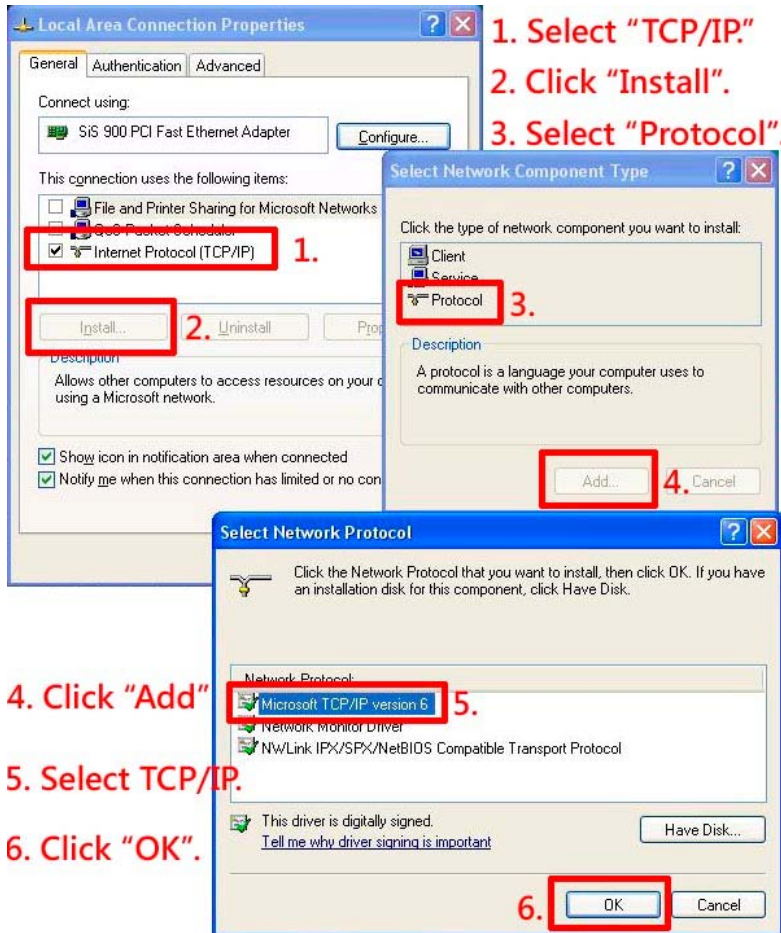


TCP/IP configuration setting

Click **Start > Control Panel > Network Connections**.

Select **Internet Protocol (TCP/IP)**, and then click **Properties**.

Before processing the IP camera installation in a WAN, please make sure the Internet connection works properly. If not, please contact your ISP provider.

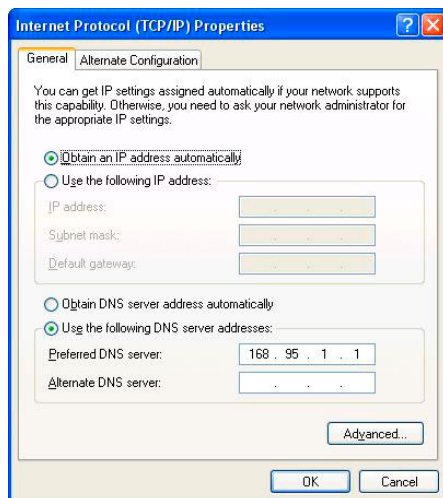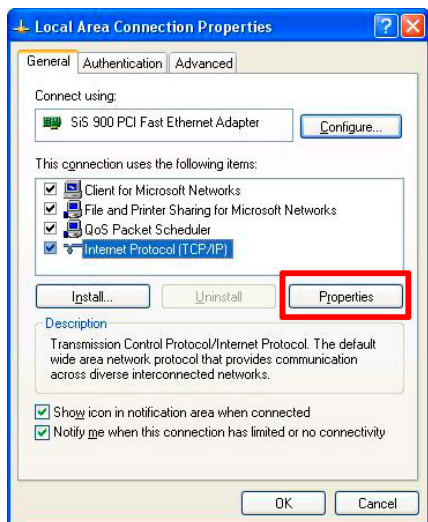


If you are using a DHCP server, please select **Obtain an IP address automatically**. Any assigned IP address for the connected IP cameras must be in the same class type as the server. If there is no DHCP server, please select **specify an IP address** enter the IP address, subnet mask and default gateway of your choosing of your PC. This IP address must be different from other network IP devices but in the same class type.

NOTE: The IP address of an IP camera in a network must be unique to itself as opposed to those of the other chosen PCs, but in the same class type.

Connection Testing


With the previous settings, follow the instructions below to ensure whether you have established the connection successfully.

1. Click **Start > All Programs > Command Prompt**.

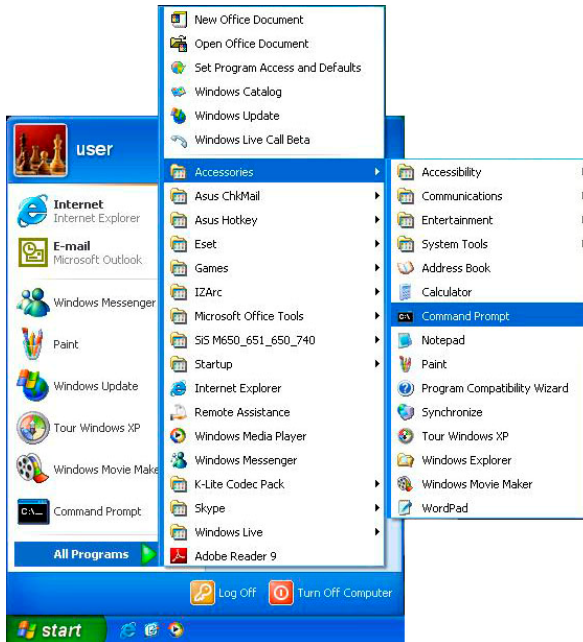

2. Enter **ping XXX.XXX.XXX.XXX** (the camera's IP address), then enter. (See the sample screen below).


**** This is the IP address for an IP camera that is assigned for the connected IP camera.**

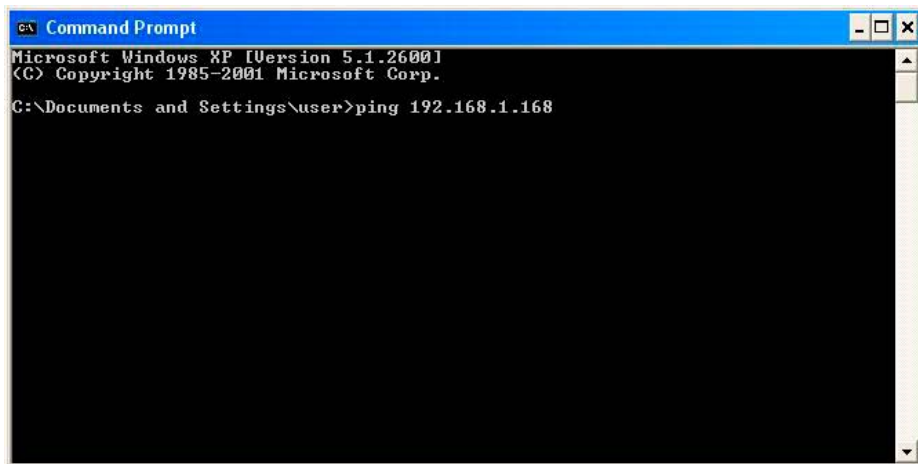

```
C:\ Command Prompt
Microsoft Windows XP [Version 5.1.2600]
(C) Copyright 1985-2001 Microsoft Corp.

C:\Documents and Settings\user>ping 192.168.1.168
```

If you receive a response as in the sample screen below, the connection hasn't been successfully established. Please re-check all the hardware and software installations by repeating last two sections. If you still can't establish the connection after rechecking, please contact your dealer.

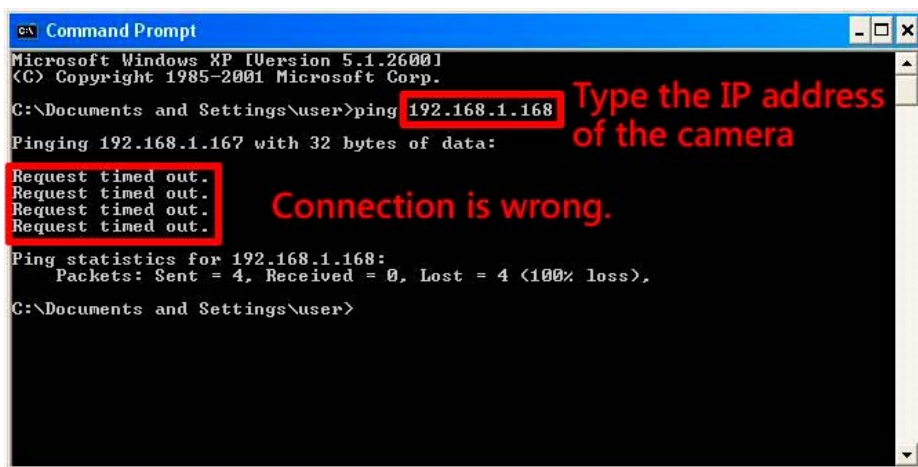

```
C:\ Command Prompt
Microsoft Windows XP [Version 5.1.2600]
(C) Copyright 1985-2001 Microsoft Corp.

C:\Documents and Settings\user>ping 192.168.1.168
Pinging 192.168.1.167 with 32 bytes of data:
Request timed out.
Request timed out.
Request timed out.
Request timed out.

Ping statistics for 192.168.1.168:
    Packets: Sent = 4, Received = 0, Lost = 4 (100% loss),

C:\Documents and Settings\user>
```

Type the IP address of the camera

Connection is wrong.

If you receive a response as in the sample screen below, you have successfully made the connection.

```
Command Prompt
Microsoft Windows XP [Version 5.1.2600]
(C) Copyright 1985-2001 Microsoft Corp.

C:\Documents and Settings\user>ping 192.168.1.168
Pinging 192.168.1.168 with 32 bytes of data:

Reply from 192.168.1.168: bytes=32 time=1ms TTL=100
Reply from 192.168.1.168: bytes=32 time<1ms TTL=100
Reply from 192.168.1.168: bytes=32 time=1ms TTL=100
Reply from 192.168.1.168: bytes=32 time<1ms TTL=100

Ping statistics for 192.168.1.168:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 1ms, Average = 0ms

C:\Documents and Settings\user>
```

Type the IP address
of the camera

Connection is
successful


5 Configuration Using A Web Browser

The configuration pages accessed with a web browser provides the functions of configuring, monitoring remote zones or watching recorded data through the TCP/IP protocol. The details are listed as follows.

RJ-45 PIN configuration for Ethernet

PIN NO.	PIN Assignment
1.	TX +
2.	TX -
3.	RX +
4.	Not Connected
5.	Not Connected
6.	RX -
7.	Not Connected
8.	Not Connected

RJ-45 socket



Physical specification for Ethernet

Wire type	Cat. 5
Connector type	RJ-45
Max. cable length	100 m
Hub wiring configuration	Straight Through or Cross Over
PC wiring configuration	Straight Through or Cross Over

Web Configuration pages

Connecting the IP camera

1. Start Microsoft Internet Explorer, Mozilla Firefox, Google Chrome, etc.
2. Click on the URL block at the top of the window.
3. Enter the URL address of the IP camera into the URL block and press the **"Enter"** button to enter the home page.
4. Enter the "User Name" and "Password" in the appropriate spaces.
5. Select **"OK"**.

Note

The default "User Name" and "Password" are **DeviceID** and **9999**, respectively.

The page headlined "Enter Network Password" is shown below. Please enter the user name and password of the IP camera when you see it. If either the user name or the password is incorrect, please check the input data and rectify it as necessary.

Once authorized successfully, the login page will not appear again until you close the window and reconnect it.


The initial sequence of proceeding is to type in your IP address and click the "Enter" button to access the home page. If and when you revise or change data in the "SYSTEM USERS" page, the sequence will alter to initially show the "Enter Network Password" page.







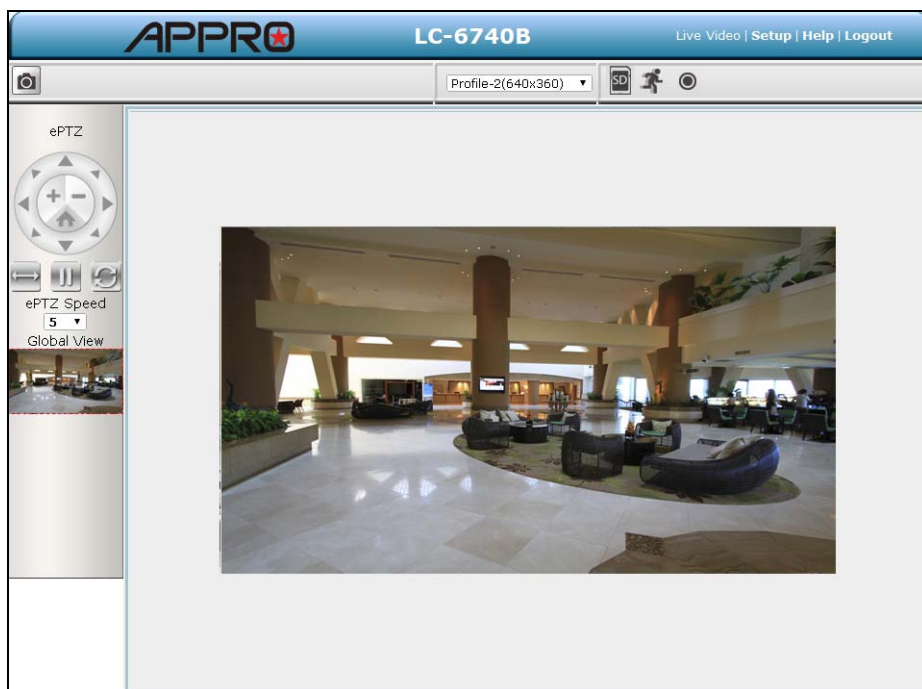

Live Video



The Live Video from the IP camera is displayed on the home page when your PC is online with the IP camera. There are also additional settings provided on the home page. The AJAX (default) and the ActiveX viewer types display different display formats on their home page.

The AJAX viewer type: Non-IE browsers support (for the JPEG mode only).







- Click to change the pairs of resolution and quality which you already arranged in the “Audio and Video” setting page (for the JPEG mode).
-  SD card icon: Check if the SD card is inserted or not. When a SD card is inserted, the icon becomes red .
-  Motion-on icon: When there is a detection of motion, the icon will appear in the right upper corner to warn the user. When the motion detection is triggered, the icon will blink red .
-  Status Recording on icon: The icon will appear on the upper right corner. When the recording is triggered, the icon will become red  and record the images into the inserted

SD card.

-  Alarm on-icon: When there is a detection of external devices such as a sensor, The icon will appear on the upper right corner warn the user. When an alarm is triggered, the icon will blink red .

The ePTZ control panel:










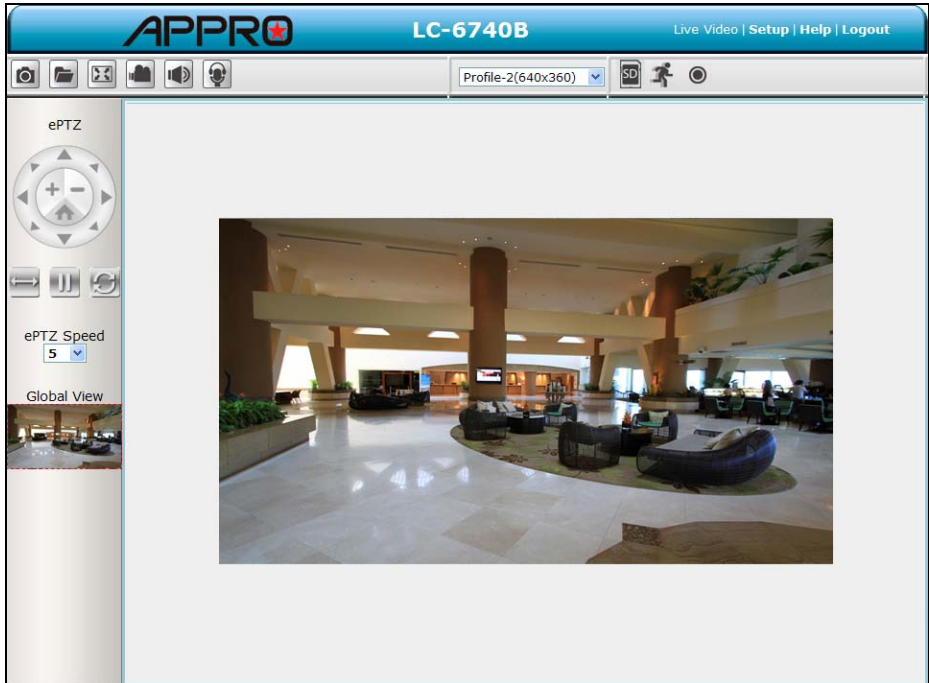


- Click  to start the electronically pan, tilt, and zoom (ePTZ) within the camera's predefined view area, if one has been defined.
-  SD card icon: Starts the automatic panning function. The ROI will pan from back and forth within the FoV.
-  Motion-on icon: Stops automatic panning.
-  Preset Path: Starts the camera's motion along the predefined path.
- ePTZ Speed: You may select a value between 0 and 64. 0 is the slowest and 64 is the fastest.





Setup

The ActiveX viewer type:

You can select from the available thumbnails for your option of taking a Snapshot, setting the Storage Folder, selecting the Full Screen mode, Recording, Listen, Talk and Zoom.



- Snapshot: Click on the  button to take a snapshot. The icon will change to a blue color  while working effectively.
- Set Storage Path: Click on the  button to set a storage folder for saving the snapshot and the video clips.
- Full Screen: Click on the  button to enter the full screen mode. The icon will change to a blue color  while working effectively.
- Record switch: Click on the  button to record a video clip. The icon will change to a blue color  while working effectively.
- Audio switch: Click on the  button to start/stop the audio-in function (listen/stop listening). The icon will change to a blue color  while working effectively.

- Talk switch: Click on the  button to start/stop audio out function (talk/stop talking). The icon will change to a blue color  while working effectively.
- Digital output: Click on the  button to start/stop digital output. The icon will change to a blue color  while working effectively.
- EPTZ: The Digital Zoom mode. The mode utilizes the high resolution feature of the mega pixel camera to simulate the mechanical functions of the PTZ camera. The mode helps the user to filter the image details more efficiently. When the digital zoom mode is active, the image can be zoomed in and out directly.

Hold the left key of the mouse and move the mouse in the preferred direction in the Global View area. As the mouse moves, the live view area shows the corresponding image until the border of the image appears.
- Live Video: Click to go back to the device's homepage.
- Setup: Click to proceed to the advanced settings.
- Logout: Click to close the window.

Click on the **Setup** button on the home page to proceed to the advanced settings.

5.1.3.1 Wizard

To quickly configure your IP Camera, click **Wizard** on the top of the Setup pages.


This wizard will guide you through a step-by-step process to configure your new camera and connect the camera to the Internet.



The screenshot shows the 'IPNetCam' title bar at the top. Below it, the text reads: 'Welcome to setup wizard - internet connection setup'. A paragraph follows: 'This wizard will guide you through a step-by-step process to configure your new Camera and connect the camera to the internet. To set-up your camera motion detection settings, please click Back button to close this wizard and re-open the motion detection setup wizard.' Below this text is a bulleted list of five steps: 'Step 1: Setup LAN Settings', 'Step 2: Setup Internet Settings', 'Step 3: Setup DDNS Settings', 'Step 4: Camera Name Settings', and 'Step 5: Setup Time Zone'. At the bottom are three buttons: 'Back', 'Next', and 'Cancel'.

Click **Next** to continue.

Step 1:

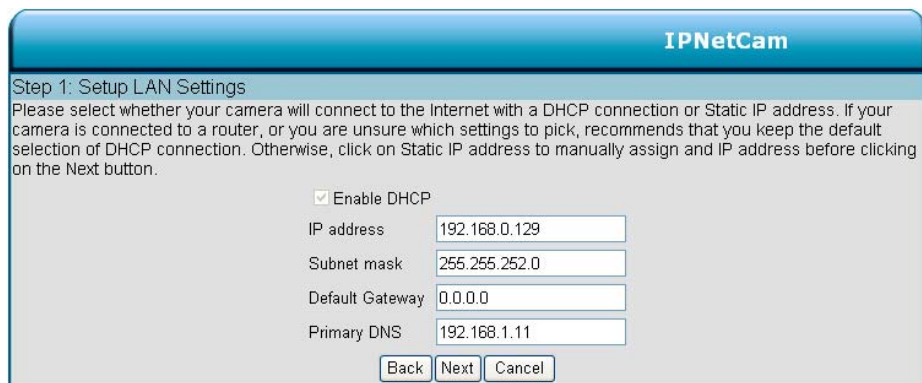


The screenshot shows the 'IPNetCam' title bar at the top. Below it, the text reads: 'Step 1: Setup LAN Settings'. A paragraph follows: 'Please select whether your camera will connect to the Internet with a DHCP connection or Static IP address. If your camera is connected to a router, or you are unsure which settings to pick, recommends that you keep the default selection of DHCP connection. Otherwise, click on Static IP address to manually assign an IP address before clicking on the Next button.' Below this text is a checkbox labeled 'Enable DHCP' which is checked. Below the checkbox are four input fields: 'IP address' with the value '192.168.0.129', 'Subnet mask' with the value '255.255.252.0', 'Default Gateway' with the value '0.0.0.0', and 'Primary DNS' with the value '192.168.1.11'. At the bottom are three buttons: 'Back', 'Next', and 'Cancel'.

The IP Camera default setting is DHCP **On**. Use the DHCP protocol if the DHCP server is working in the LAN. The IP Camera will obtain an IP address automatically from the DHCP server. Or you can turn the DHCP **Off** to build the IP Camera working environment with a static IP address. The default static IP is **192.168.1.168**. You can set an IP address for the IP Camera if the LAN unit isn't connected to a DHCP server.

If your Internet Service Provider has provided you with connection settings, or you wish to set a static address within your home network, enter the accurate information for your static IP setting.

Click **Next** to continue.

Step 2:

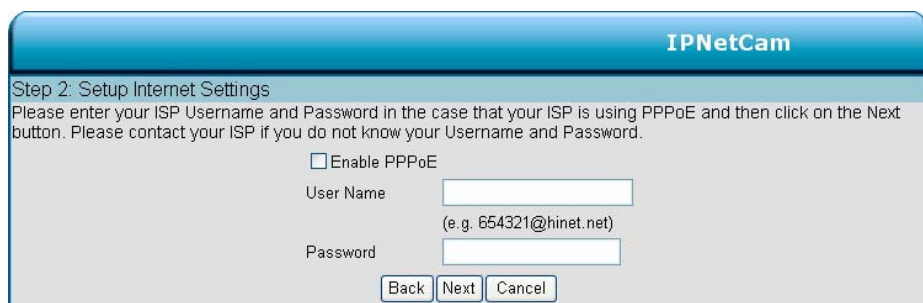

The screenshot shows the 'IPNetCam' interface for 'Step 2: Setup Internet Settings'. It includes instructions on entering ISP credentials for PPPoE. There is a checkbox for 'Enable PPPoE', followed by 'User Name' and 'Password' input fields. A sample email address is provided as a hint. At the bottom are 'Back', 'Next', and 'Cancel' buttons.

IPNetCam

Step 2: Setup Internet Settings

Please enter your ISP Username and Password in the case that your ISP is using PPPoE and then click on the Next button. Please contact your ISP if you do not know your Username and Password.

☐ Enable PPPoE


User Name

(e.g. 654321@hinet.net)

Password

If you are using PPPoE, select Enable and enter your user name and password, otherwise select Disable and click **Next** to continue.

Step 3:

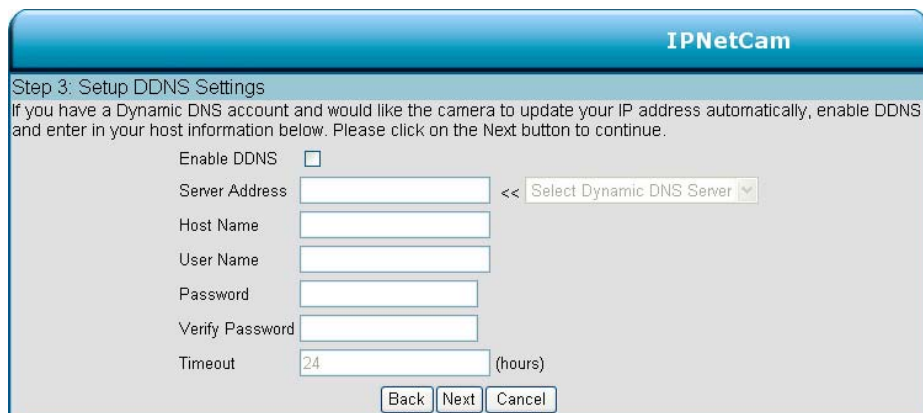

The screenshot shows the 'IPNetCam' interface for 'Step 3: Setup DDNS Settings'. It includes instructions on enabling Dynamic DNS. There is a checkbox for 'Enable DDNS', followed by 'Server Address', 'Host Name', 'User Name', 'Password', and 'Verify Password' input fields. A dropdown menu for 'Select Dynamic DNS Server' is next to the 'Server Address' field. The 'Timeout' field is set to 24 hours. At the bottom are 'Back', 'Next', and 'Cancel' buttons.

IPNetCam

Step 3: Setup DDNS Settings

If you have a Dynamic DNS account and would like the camera to update your IP address automatically, enable DDNS and enter in your host information below. Please click on the Next button to continue.

Enable DDNS ☐

Server Address << Select Dynamic DNS Server ▾

Host Name

User Name

Password

Verify Password

Timeout (hours)

If you have a Dynamic DNS account and would like the camera to update your IP address automatically, Select **Enable** and enter your host information.

Click **Next** to continue.

Step 4:

IPNetCam

Step 4: Camera Name Settings

Recommends that you rename your camera for easy accessibility. You can then identify and connect to your camera via this name. Please assign a name of your choice before clicking on the Next button.

IP Camera Name

IP camera

Back

Next

Cancel

Enter a name for your camera and click **Next** to continue.

Step5:

IPNetCam

Step 5: Setup Time Zone

Please configure the correct time to ensure that all events are triggered, captured and scheduled at the correct time and day and then click on the Next button.

Time Zone

(GMT+08:00) Taipei

Enable Daylight Saving

☐

Back

Next

Cancel

Configure the correct time to ensure that all events will be triggered, captured and scheduled at the right time. Click **Next** to continue.

Step 6:

IPNetCam

Step 6: Setup complete

Below is a summary of your camera settings. Click on the Back button to review or modify settings or click on the Apply button if all settings are correct. It is recommended to note down these settings in order to access your camera on the network or via your web browser.

IP Address	DHCP
IP Camera Name	IP Camera
Time Zone	(GMT+08:00) Taipei
DDNS	Disable
PPPoE	Disable

Back

Apply

Cancel

If you have selected **DHCP**, you will see a summary of your camera's settings. Please note down all this information as you will need it for accessing your camera within the network. Click **Apply** to save your settings.

Change Image Setting

Please follow the steps below to change the video setting through the network as necessary. A preview of the image will be shown in the window of Live Video. Click **Submit** to activate and save your changes.

- [The Image Setup setting page](#)

1. Click on the **Image** button to enter the image-setting page.

APPRO

LC-6740B

Live Video | Setup | Wizard | Help

Image	Network	System	Application	Storage	Status
-------	---------	--------	-------------	---------	--------

Image


Audio and Video

Privacy Mask

Logout

IMAGE SETUP

IMAGE SETTINGS



Exposure Mode

Auto

Max Gain

24

dB

Denoise

0

Mirror

☐ On

☒ Off

Flip

☐ On

☒ Off

White Balance

Auto

Save

Brightness

50

Contrast

50

Saturation

50

Sharpness

50

Reset Default

DEVICE SETTING

Device Name

LC-6740B

maximum 63 characters

☐ Enable OSD

Timestamp Label

LC-6740B

maximum 63 characters

Date/Time Location

UPPER LEFT

Label Location

UPPER LEFT

Submit

2. Adjust the "Viewer Type". Click to choose the viewer type of the "AJAX" or "ActiveX" mode (IE browser only).
3. Adjust the "Image Settings", including "Exposure Time", "Denoise", "Mirror", "Flip", "White

Balance", "Brightness", "Contrast", "Saturation" and "Sharpness" as necessary.

4. Adjust the "Device Settings" including "Device Name" and "Timestamp".

- Click "**Enable OSD**" to checkmark the box and activate the function.
- Enter the "Timestamp Label" you have chosen.
- Enter the "Timestamp Location" you have chosen.

5. Click on the **Submit** button to submit the new image setting.

Description of function keys:

Exposure Mode	<p>Exposure Mode controls a camera by shutter speed and the lens aperture.</p> <p>Auto: Automatic exposure mode. The default shutter time is 1/30~1/10000 (1/25~1/10000) and the maximum gain is 36 dB.</p> <p>Indoor: The optimum exposure setting is pre-programmed for the indoor environment. The default shutter time is 1/30~1/120 (1/25~1/100) and the maximum gain is 36 dB.</p> <p>Outdoor: The optimum exposure setting is pre-programmed for the outdoor environment. The default shutter time is 1/30~1/750 (1/25~1/750) and the maximum gain is 36 dB.</p> <p>Night: The optimum exposure setting is pre-programmed for the night environment. The default shutter time is 1/30~1/750 (1/25~1/500) and the maximum gain is 12 dB.</p> <p>Moving: The optimum exposure setting is pre-programmed for moving subjects. The default shutter time is 1/120~1/1,000 (1/100~1/1,000) and the maximum gain is 36 dB.</p> <p>Low noise: The optimum exposure setting is pre-programmed to reduce the noise. The default shutter time is 1/8~1/30 (1/7.5~1/25) and the maximum gain is 36 dB.</p> <p>Customize 1-3: You can customize an exposure mode by adjusting individual parameters like Gain and Shutter.</p> <p>Schedule: In the Schedule mode, you can set the customize schedule. Select a schedule and set the time period. You can assign one of the exposure modes to be the function mode of the Remaining time. Check and press to Save.</p> <p>Note: The period of the schedule can't be set across midnight. For example, if you want to set a schedule of Night mode from 22:00 to 04:00, you have to (1) check a schedule and select the Night mode and set the period from 22:00 to 24:00, then (2) enable the next schedule and set it to Night mode and set the period from 00:00 to 04:00. Remember to click Save to activate.</p>
Denoise	Denoise (noise reduction) is the process of removing noise from signals.
Mirror:	The mirror stores the images reflected by it so it can be used for surveillance or to simply take your own picture.
Flip	To flip the camera's lens 180 degrees.
White Balance	White balance is the process of removing unnatural shades of color, so that objects which appear white in reality are rendered white in the images. Select your options from "Auto", "Outdoor", "Indoor", "Fluorescent" and "Push Hold".
Brightness	An adjustable setting to compensate for backlit scenes.
Contrast	The measurement for color intensity/strength.
Saturation	This setting controls the strength of colors from black and white to bold colors.
Sharpness	An adjustable setting to set the clarity of detail in the images.
Timestamp Label	Enter the timestamp label.
Timestamp Location	Click to open the list of four location modes to choose from: "UPPER LEFT", "UPPER RIGHT", "BOTTOM LEFT", and "BOTTOM RIGHT".
Submit	Click to set.

- The Audio and Video setting page

1. Click on the **Audio and Video** button to enter the Audio and video page to set the details of the device. You may configure video profiles with different settings for your camera. Hence, you may setup different profiles for your computer and mobile displays. In addition, you may also configure your audio setup for your camera. Click **Submit** to activate and save your changes.

APPRO LC-6740B Live Video | Setup | Wizard | Help

Image	Network	System	Application	Storage	Status
Image	AUDIO AND VIDEO				
Audio and Video	VIDEO SETTINGS				
Privacy Mask	Aspect ratio: 16:9 [Save] [Default]				
Logout	<p>Warning: Change the aspect ratio will clear the settings of privacy mask and preset and motion detection.</p> <p>VIDEO PROFILE 1</p> <p>Mode: H.264 Frame size: 1280x720 Viewer window area: 1280x720 Intra Frame Period: 30 Maximum frame rate: 30 Video quality: Constant bit rate: 1M Fixed quality: High</p> <p>VIDEO PROFILE 2</p> <p>Mode: H.264 Frame size: 320x176 Viewer window area: 320x176 Intra Frame Period: 30 Maximum frame rate: 30 Video quality: Constant bit rate: 1M Fixed quality: High</p> <p>AUDIO SETTINGS</p> <p>Encoding: G.711 <input checked="" type="checkbox"/> Audio Mechanism Setting Audio Mic Gain: 20dB <input checked="" type="checkbox"/> Enable audio out Audio out volume level: 7</p> <p>[Submit]</p>				

2. Select the Profile Number from 1-2. Then set the Aspect ratio of 4:3 or 16:9. Click Save to activate it.
3. Set the "Mode", "Frame size", "Viewer window area", "Maximum frame rate" and "Video quality" of the Video Profile as necessary.



4. Set the details of the audio functions.
5. Select 50 Hz or 60Hz of the Power Line.
6. Click on the **Submit** button to submit the new setting.



Description of function keys:

Aspect ratio:	The aspect ratio of an image is the ratio of the width of the image to its height. Select 4:3 or 16:9 of the ratio that best suits your needs.
Mode:	Choose the video format from "H.264" or "JPEG". In JPEG mode, the video frames are independent.
Frame size:	This option allows the user to choose the video resolution of the live view area: 4:3 - 1024x768, 800x600, 640x480, 480x360, 320x240, 176x144. 16:9 - 1280x720, 800x450, 640x360, 480x270, 320x176, 176x144.
Viewer window area:	This option allows the user to choose the video resolution of the live view area: 4:3 - 1024x768, 800x600, 640x480, 480x360, 320x240, 176x144. 16:9 - 1280x720, 800x450, 640x360, 480x270, 320x176, 176x144.
Intra Frame Period:	In the H.264 mode, if there is little motion and most of the video content does not change from frame to frame, the H.264 encoding can compress the video by intra-frame way to keep the quality from loss. You can set the desired time period to use intra-frame compression.
Maximum frame rate:	Click on the drop-down list to choose the frame rates of "30FPS", "15FPS", "7FPS", "4FPS" and "1FPS" in all resolution.
Video quality:	Selects the image quality level of JPEG images captured from "Highest", "High", "Medium", "Low" and "Lowest". Selects the image quality level of H.264 images captured from "Constant bit" (4M, 2M, 1M, 512K, 256K, 200K, 128K and 64K) or "Fixed Quality" (Highest, High, Medium, Low and Lowest).
Audio Settings:	You can use the option to switch the external microphone on/off or adjust the volume.
Encoding:	Click on the drop-down list to choose the audio encoding of "G.711" and "G.726". G.726 offers quality nearly identical to G.711, but it uses only half the bandwidth.
Audio Mechanism Setting:	Check to activate this function. Then select MIC or Line In. NOTE: The option of 26dB is for long-distance audio receiving, especially longer than 3 meters.
Enable audio out:	Check to activate this function. Then set the Audio out volume level.
Power Line	Select 50 Hz or 60Hz that depends on your local electric utility configuration.

Note

In order to use the Audio In/ Out signal function, please follow the steps given below.

1. Connect to the camera webpage over the PC IE Browser.
2. Ensure "Audio Mechanism Setting" & "Enable audio out" are both selected. Click Submit.
3. Connect the Mic to the PC, and connect the camera Audio out to the speaker.
4. Select "Talk"  →  ; speak to the PC-connected microphone.
5. Confirm the sounds made in the camera-connected speaker.

6. Connect the Mic to the camera--Audio in; connect the speaker to the PC—AUDIO Out.
7. Click “Listen” in the webpage  → ; the Mic sends audio signals to the camera.
8. Confirm the sounds from the PC speaker.

- The Privacy Mask setting page

Click on the **Privacy Mask** button to enter the Privacy Mask Area setting page. Mask 3 privacy area(s) on video to specify up to the area(s) on the camera's image to be blocked/excluded from recordings and snapshots.

APPRO

LC-6740B

Live Video | Setup | Wizard | Help

Image	Network	System	Application	Storage	Status
-------	---------	--------	-------------	---------	--------

Image


Audio and Video

Privacy Mask

Logout

PRIVACY MASK AREA OF VIDEO SETTING

PRIVACY MASK AREA OF VIDEO SETTING



- Privacy mask: mask 3 privacy area(s) on video.
- Press the left mouse button, drag and drop to set the privacy area.
- After you finish all privacy mask settings, click the Save button.

Restore

Save

1. Click the right mouse button on the video control to show the pop-menu.
2. Press the left mouse button, drag and drop to set the privacy area.
3. Privacy area can be enabled or disabled.
4. After you finish all privacy mask settings, click the **Submit** button.

5.1.3.3 Change the Network Setting

Please follow the steps below to change the network setting through the network as necessary.

- Set the network options and IP address.

1. Click on the **Network** button in the home page to enter the Network Setup page.

2. The accessible networks here are the “PPPoE”, “Port Detail”, ”Traffic”, “Dynamic DNS”, “HTTPS” and ”Access List”.
3. Set the details of the “LAN Settings” for your local area network as necessary.
4. Click on the **Submit** button to submit the new network setting.

Description of function keys:

DHCP:	If you have a DHCP server running on your network and would like a dynamic IP address to be updated to your camera automatically.
DNS	(The Domain Name System) is an Internet service that translates domain names into IP addresses (e.g., 192.168.0.20). The address can be obtained from your ISP or network gateway.
Enable UPnP Presentation:	Enable this setting to allow your camera to be configured as an UPnP device in your network.
Enable UPnP port forwarding:	Enable this setting to allow the camera to add port forwarding entries into the router automatically on a UPnP capable network.

● Change the Network Setting — Wireless Setup.

The “Network” page has, on its upper left, the “Wireless Setup” icon. This section allows you to set up and configure the wireless settings on your camera. You may choose which wireless network for the connection using the pull-down menu of Site Survey or enter the SSID manually. After making any changes, click the **Submit** button to save your changes.

1. Click on the **Wireless Setup** button on the upper left menu to enter the “Wireless Setup” Settings page.

APPRO

LC-6740B

Live Video | Setup | Wizard | Help

Image	Network	System	Application	Storage	Status
Network	WIRELESS SETUP				
Wireless Setup	WIRELESS CONFIGURATION				
PPPoE	Enable Wireless <input type="checkbox"/>				
Port Detail	Site Survey <div>===SSID List===</div> <div>Rescan</div>				
Traffic	SSID <div>default</div>				
Dynamic DNS	Wireless Mode <div>Infrastructure</div>				
HTTPS	Channel <div>Auto</div>				
Access List	Authentication <div>Open</div>				
Logout	Encryption <div>Disable</div>				
	Default Key <div>1</div>				
	Key 1 <div>*****</div>				
	Key 2 <div>*****</div>				
	Key 3 <div>*****</div>				
	Key 4 <div>*****</div>				
	(5 or 13 ASCII, 10 or 26 HEX characters)				
	<div>Submit</div>				

2. Active the “Enable Wireless” status of the function. Click your choices to enable.
3. Click on the **Submit** button to submit the new setting.

Note

Please refer to section PPPoE & DDNS for more details.

Description of function keys:


Site Survey	You can use the drop-down list to select an available wireless network. The related information (SSID, Wireless Mode, Channel, Authentication, Encryption) will be automatically filled in for you.
SSID	SSID (Service Set Identifier) is the name of your wireless network such as Default, Conference, My network, and etc. Enter the SSID of the wireless access point you wish to use.

Wireless Mode	Use the drop-down box to select the mode of the wireless network you wish to connect to. Infrastructure is normally used to connect to an access point or router. Ad-Hoc is usually used to connect directly to another computer.
Channel	If you are using Ad Hoc mode, select the channel of the wireless network you wish to connect to, or select Auto.
Authentication	<p>Select the authentication you use on your wireless network - Open, Shared, WPA-PSK, or WPA2-PSK.</p> <p>Open: This option makes the camera visible to all devices on the network. No encryption is provided.</p> <p>Shared: Allows communication only with other devices that have the identical WEP (Wired Equivalent Privacy) settings.</p> <p>WPA-PSK, WPA2-PSK: Both modes will require you to input a pre-shared Key for the connection that is held between the camera and the wireless device.</p>
Encryption	If you use WPA-PSK or WPA2-PSK authentication, you will need to specify whether your wireless network uses TKIP or AES encryption. If you use Open or Shared authentication, WEP encryption should be the setting.
Key:	If you use WEP, WPA-PSK, or WPA2-PSK authentication, enter the Key (also known as password) used for your wireless network.

● Change the Network Setting — PPPoE

The “Network” page has, on its upper left, the “PPPoE” icon. Please follow the steps below to change the PPPoE setting through the network as necessary.

1. Click on the **PPPoE** button on the upper left menu to enter the “PPPoE Settings” page.

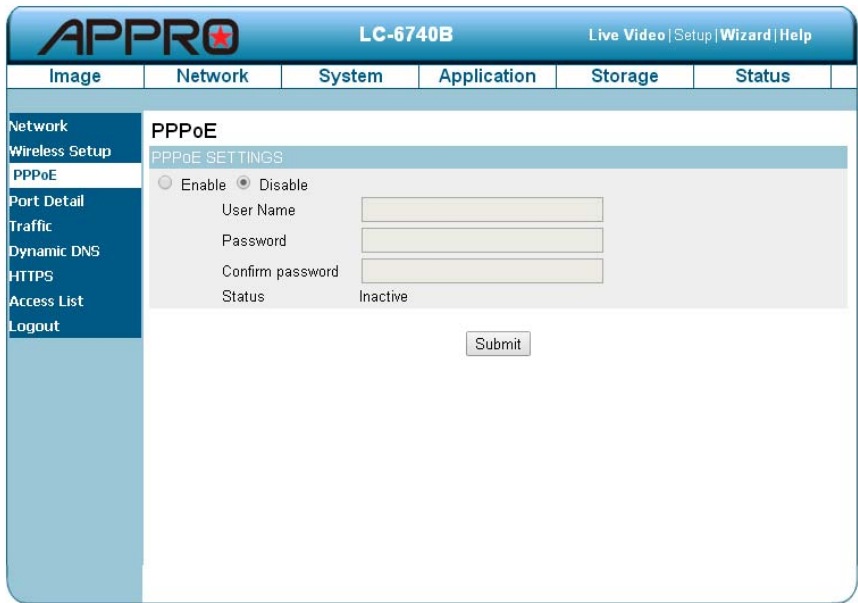

2. Active the “Enable” or “Disable” status of the PPPoE Settings function. Click your choices to enable.
3. Enter the PPPoE “Username” and the PPPoE “Password”, then confirm the password again.
4. Click on the **Submit** button to submit the new setting.

Note

Please refer to section PPPoE & DDNS for more details.

Description of function keys:

PPPoE Setting	If you use the camera to connect directly to the Internet, you will need to enter the username and password, which were given to you when you set up your account with your Internet Service Provider. If the camera is behind a router or a gateway, you do not need to configure this setting.
Username:	Enter it in the given space.
Password:	Enter it in the required space.

● Change the Network Setting — Port Detail.

The “Network” page has, on its upper left, the “Port Detail” icon. It allows you to specify and reserve the ports for both the HTTP and RSTP streaming. Please follow the steps below to change the Port Detail setting through the network as necessary.

1. Click on the **Port Detail** button on the upper left menu to enter the “Port Detail” page.

APPRO

LC-6740B

Live Video | Setup | Wizard | Help

Image	Network	System	Application	Storage	Status
Network	PORT DETAIL				
Wireless Setup	HTTP				
PPPoE	HTTP port <input type="text" value="80"/>				
Port Detail	Access name for stream1 <input type="text" value="video1.mjpg"/>				
Traffic	Access name for stream2 <input type="text" value="video2.mjpg"/>				
Dynamic DNS	HTTPS				
HTTPS	HTTPS port <input type="text" value="443"/>				
Access List	RTSP				
Logout	RTSP port <input type="text" value="554"/>				
	Access name for stream1 <input type="text" value="live1.sdp"/>				
	Access name for stream2 <input type="text" value="live2.sdp"/>				
	<input type="button" value="Submit"/>				

2. Enter the “HTTP port” and the “Access name for stream” for the MJPEG streams of the HTTP.
3. Enter the “HTTPS port”. The default value is 443.
4. Enter the “RTSP port” and the “Access name for stream” for the MJPEG or JPEG streams of the RSTP.
5. Click on the **Submit** button to submit the new setting.

Note

If you want to use an RTSP player to access the IP camera, you have to use the following RTSP URL command to request transmission of the streaming data.

Description of function keys:

HTTP Port	HTTP ports allow you to connect to the camera via a standard web browser. This port can be set to a number other than the default HTTP port 80. A corresponding port must be opened on the router. For example, if the port is changed to 8080, users must type in the web browser 'http://192.168.0.100:8080' instead of 'http://192.168.0.100'.
HTTPS Port	HTTPS Port in a camera connects it with a PC via a secure web browser.
RTSP Port	The port number that you use for RTSP streaming to mobile devices, such as mobile phones or PDAs. You may specify the address of a particular stream. For instance, live1.sdp can be accessed at rtsp://x.x.x.x/video1.sdp where the x.x.x.x represents the IP address of your camera.

Note

Using a RSTP player to view the video streams

- (1) Launch the RTSP player.
- (2) Choose "File", and an "Open URL" dialog box will pop up.
- (3) Enter an Internet URL to open. The address format is rtsp://<ip address>:<rtsp port>/<RTSP streaming access name for stream1, stream2 or stream3>
- (4) The live video will be displayed in your player.

- Change the Network Setting —Network Traffic.

The “Network” page has, on its upper left, the “Traffic” icon. Specifying the maximum download/upload bandwidth for each socket is useful when connecting your device to a busy or heavily loaded network. Please follow the steps below to change the setting through the network as necessary.

1. Click on the **Traffic** button on the upper left menu to enter the “Traffic” page.

2. Enter the “Maximum Upload Bandwidth” and the “Maximum Download Bandwidth”.
3. Click on the **Submit** button to submit the new setting.

Description of function keys:

Maximum Upload Bandwidth:	Enter it in the given space from a range of 0 to 102400.
Maximum Download Bandwidth:	Enter it in the required space from a range of 0 to 102400.
Submit:	Click to set.

● Change the Network Setting — DDNS.

The DDNS (Dynamic Domain Name Server) will hold a DNS host name and synchronize the public IP address of the modem when it has been modified. The user name and password are required when using the DDNS service. The “Network” page has, on its upper left, the “DDNS” icon. Please follow the steps below to change the DDNS setting through the network as necessary.

1. Click on the **Dynamic DNS** button on the upper left menu to enter the “Dynamic DNS” page.

The screenshot shows the web interface of the APPRO LC-6740B device. The top navigation bar includes the logo, model number, and links for Live Video, Setup, Wizard, and Help. Below this is a menu with tabs for Image, Network, System, Application, Storage, and Status. The left sidebar contains a list of network-related options: Network, Wireless Setup, PPPoE, Port Detail, Traffic, Dynamic DNS (highlighted), HTTPS, Access List, and Logout. The main content area is titled 'DYNAMIC DNS' and contains a 'DYNAMIC DNS SETTING' section. This section includes a checkbox for 'Enable DDNS', a 'Server Address' field with a dropdown menu (currently showing 'www.DynDNS.org'), and input fields for 'Host Name', 'User Name', 'Password', and 'Verify Password'. There is also a 'Timeout' field set to '600' (hours) and a 'Status' field showing 'Inactive'. A 'Submit' button is located at the bottom right of the settings area.

2. Click “Enable DDNS” to checkmark the box and activate the function.
3. Fill in your dynamic “Server Address”, “Host Name”, “User Name”, “Password”, “Verify Password”, “Timeout”, “IP Address” and “Email Address”.
4. Click on the **Submit** button to submit the new setting.

Note

Please refer to section PPPoE & DDNS for more details.

Description of function keys:

Enable DDNS Function:	Checkmark to activate the function.
DNS	(The Domain Name System) is an Internet service that translates domain names into IP addresses (i.e. 192.168.0.20). The address can be obtained from your ISP or network gateway.
Server Address:	Select your Dynamic DNS provider from the pull down menu or enter the server address manually.

Host Name:	Enter the host name of the DDNS server.
User name:	Enter your user name or e-mail used to connect to the DDNS
Password:	Enter your password used to connect to the DDNS server.
Verify Password	Enter your password again to connect to the DDNS server.
Timeout:	Enter the DNS Timeout values for registering the IP address.
Status:	Indicate the connection status, automatically determined by the system.

● Change the Network Setting — HTTPS.

The “Network” page has, on its upper left, the “HTTPS” icon. Please follow the steps below to change the HTTPS setting through the network as necessary.

1. Click on the **HTTPS** button on the upper left menu to enter the “HTTPS Setting” page.

APPRO

LC-6740B

Live Video | Setup | Wizard | Help

Image	Network	System	Application	Storage	Status
-------	---------	--------	-------------	---------	--------

Network

Wireless Setup

PPPoE

Port Detail

Traffic

Dynamic DNS

HTTPS

Access List

Logout

HTTPS

☐ Enable secure HTTPS connection

Create certificate settings

☒ Create self-signed certificate automatically

☐ Create self-signed certificate manually

☐ Create certificate request and install

Create certificate: Private key exists

CERTIFICATE INFORMATION

StatusActive

CountryTW

State or provinceTaiwan

LocalityTaipei

OrganizationAPPRO TECHNOLOGY INC.

Organization UnitR&D Dept.

Common Namewww.approtech.com

2. Mark the “Enable HTTPS secure connection” to activate the function.
3. Click to select the “Create certificate method” from “Create self-signed certificate automatically”, “Create self-signed certificate manually” and “Create certificate request and install”.
4. Click “Create” to save the create certificate settings.
5. The Certification Information will show below.
6. Click “CSR Property” to see the Certificate Signing Request information.
7. Click “Certificate Property” to see the Certificate information.
8. Click “Remove” to remove the created certificate.
9. Click on the **Submit** button to submit the new setting.

Note

The certificate cannot be removed while the HTTPS is still enabled. To remove the certificate you must first uncheck Enable HTTPS secure connection.

Methods of creating and installing the certificate:

1. Create self-signed certificate automatically

Before using HTTPS for communication with the IP camera, a Create self-signed certificate automatically:

- (1) Enable HTTPS secure connection.
- (2) Select the "Create self-signed certificate automatically" option.
- (3) Click the Create button.
- (4) The new Certification Information will show in the third column on the HTTPS setting page.
- (5) Click Home to return to the main page. Change the address from "http://" to "https://" in the address bar and press Enter on your keyboard. Some Security Alert dialogs will pop up. Click OK or Yes to enable HTTPS.

2. Create self-signed certificate manually

- (1) Enable HTTPS secure connection.
- (2) Click "Create self-signed certificate manually" to open the Create certificate column.
- (3) Click the Create button.
- (4) The new Certification Information will show in the third column on the HTTPS setting page.

3. Create certificate request and install

- (1) Enable HTTPS secure connection.
- (2) Click "Create self-signed certificate automatically" to open the Create certificate column.
- (3) Click the Create button.
- (4) If you see an Information bar, click OK and click on the Information bar at the top of the page to allow pop-ups.
- (5) The pop-up windows will show a certificate request.
- (6) Look for a trusted certificate authority that issues digital certificates. Enroll the IP camera. Wait for the certificate authority to issue a SSL certificate; click "Browse..." to search for the issued certificate, then click "Upload" on the Create certificate column.
- (7) The new Certification Information will show in the third column on the HTTPS setting page.

● [Change the Network Setting —Access List.](#)

The “Network” page has, on its upper left, the “Access List” icon. Please follow the steps below to change the Access List setting through the network as necessary.

1. Click on the **Access List** button on the upper left menu to enter the “Access List” page.

The screenshot shows the web interface for the APPRO LC-6740B device. The top navigation bar includes the APPRO logo, the model number LC-6740B, and links for Live Video, Setup, Wizard, and Help. Below this is a tabbed interface with tabs for Image, Network, System, Application, Storage, and Status. The Network tab is active, and the left sidebar menu has 'Access List' highlighted. The main content area displays the 'ACCESS LIST' configuration page. It features two sections: 'ALLOW LIST' and 'DENY LIST'. Each section contains input fields for 'Start IP address' and 'End IP address', a dropdown menu for 'Delete allow list' or 'Delete deny list', and 'Add' and 'Delete' buttons.

2. Fill in the “Start IP address”, “End IP address” and “Delete allow list” details of the “Allow List”. Press the “Add” button to add or press “Delete” to erase it.
3. Fill in the “Start IP address”, “End IP address” and “Delete deny list” details of the “Deny List”. Press the “Add” button to add or press “Delete” to erase it.
4. Click on the **Submit** button to submit the new setting.

Description of function keys:

Allow List:	
Start IP Address	The starting IP Address of the devices (such as a computer) which have permission to access the video of the camera.
End IP Address	The ending IP Address of the devices (such as a computer) which have permission to access the video of the camera.
Delete Allow List	Remove the customized setting from the Permission List.
Deny List:	
Start IP Address	The starting IP Address of the devices (such as a computer) which don't have permission to access the video of the camera.
End IP Address	The ending IP Address of the devices (such as a computer) which don't have permission to access the video of the camera.
Delete Deny List	Remove the customized setting from the Permission List.

Note

If there are any conflicts between the range of the Allow List and the range of the Deny List, the Access List within the range of the Deny List has the higher priority over the range of the Allow List.

For example, the range of the Allow List is set from 1.1.1.0 to 192.255.255.255 and the range of the Deny List is set from 1.1.1.0 to 170.255.255.255. Only users with IPs located between 171.0.0.0 and 192.255.255.255 can access the IP camera.

5.1.3.4 Change the System Setting

Please follow the steps below to change the date and time of the system setting through the network as necessary.

- Set the Time and Date of the system

1. Click on the **System** button to enter the “Time And Date” page (default). From this section, you may automatically or manually configure, update and maintain the internal system clock for your camera.

APPRO LC-6740B Live Video | Setup | Wizard | Help

Image Network **System** Application Storage Status

Time and Date
LED
User
Maintenance
Upgrade Firmware
Logout

TIME AND DATE

TIME CONFIGURATION

Time Zone: (UTC+08:00) Taipei

Time Format: YYYY/MM/DD

☐ Enable Daylight Saving

☒ Auto Daylight Saving

☐ Set date and time manually

Offset: +2:00

	Month	Week	Day of week	Hour	Minutes
Start time	5	1	Sunday	00	00
End time	10	1	Sunday	00	00

AUTOMATIC TIME CONFIGURATION

☐ Synchronize with NTP Server

NTP Server: pool.ntp.org

SET DATE AND TIME MANUALLY

☐ Set date and time manually

Copy Your Computer's Time Settings

Year: 2014 Month: 8 Day: 18

Hour: 5 Minute: 12 Second: 54

Submit


2. To set the Time Configuration, please select your time zone from the drop-down menu. Select this to enable the daylight saving time. Then Select "Auto Daylight Saving" or "Set date and time manually".
3. To set the Automatic Time Configuration, please checkmark "Synchronize with NTP Server" and enter the address of the NTP Server.
4. To set the Date and Time Manually, please checkmark "Set date and time manually". Press "Copy Your Computer's Time Settings" as necessary to synchronize the time information from your PC or just manually set the date and time from the drop-down lists.
5. Click on the **Submit** button to submit the new Date and Time settings.

Description of function keys:

Time Zone:	Select your time zone from the drop-down menu.
Enable Daylight Saving:	Select this to enable the daylight saving time.
Auto Daylight Saving:	Select this option so that your camera will configure the Daylight Saving setting automatically.
Set date and time manually:	Select this option so that you may configure the Daylight Saving date and time manually.
Offset:	Sets the amount of time to be added or removed when Daylight Saving is enabled.
Synchronize with NTP server:	Enable this feature to obtain time configuration automatically from the NTP server.
NTP Server:	The Network Time Protocol (NTP) synchronizes the device with an Internet time server. Choose the one that is closest to your location.
Set the date and time manually:	This option allows you to set the time and date manually.
Copy Your Computer's Time Settings:	This will synchronize the time information from your PC.

- Change the System Setting — LED.

You may enable the **LED** for your camera.

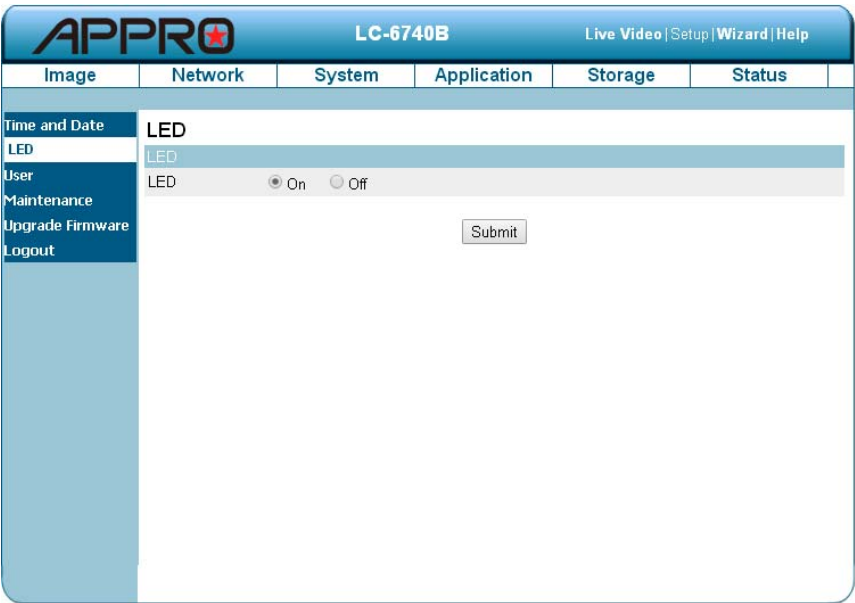

1. Click to set the LED “On” or “Off”.
2. Click on the **Submit** button to submit the new user’s setting.

Description of function keys:

LED	Select “ON” or “OFF” to use the item, which indicates a camera’s status.
-----	--

● Change the System Setting — Users.

You may modify the name and administrator's password of your camera, as well as add and manage the user accounts for accessing the camera. You may also use this section to create the unique name and configure the OSD setting for your camera. Please follow the steps below to change/add the users' authority through the network as necessary.

1. Click on the **Users** button on the left side of the “System” page to enter the “Users” page.

The screenshot shows the 'USER' management interface. The top navigation bar includes 'Image', 'Network', 'System', 'Application', 'Storage', and 'Status'. The left sidebar has 'Time and Date', 'LED', 'User', 'Maintenance', 'Upgrade Firmware', and 'Logout'. The main area is titled 'USER' and contains a 'USER LIST' table with one entry 'admin:Admin' and a 'Delete User' button. Below the table is the 'ADD/MODIFY USER' form with fields for 'User Name', 'Password', 'Confirm', and 'Authority' (Admin, Operator, Viewer). The 'User Name' field has a red note 'maximum 20 users' and the 'Password' field has a red note 'maximum 32 characters'. An 'Add/Modify User' button is at the bottom right of the form.

2. Add, modify or delete any user's data if necessary.
3. Click the **Add/ Modify User** button to submit the new user's settings.
4. Click the **Home** button to return to the home page.


Description of function keys:

User List:	The list shows the registered user(s) and the corresponding authority.
Delete:	Deletes a selected user.
Name:	Enter the user's name, which will be added or modified.
Password:	Enter the new password of the user's name above.
Confirm:	Type in the password again for verification.
Authority:	Choose an authority option of the user's name from: Admin, Operator, and Viewer.
Add/ Modify User:	Click to submit the new setting to the IP camera.

● Change the System Setting — Maintenance.

Please follow the steps below to change the system setting through the network as necessary.

Click on the **Maintenance** button on the left side of the “Date and Time” page to enter the “Maintenance” page.

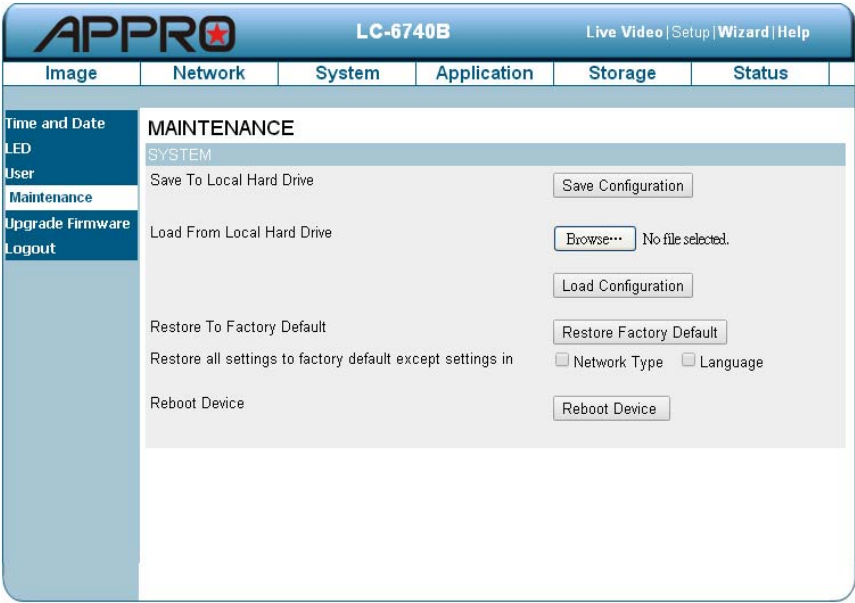

Description of function keys:

Save Configuration	Click on “Save Configuration” to save the configuration files to the local hard drive.
Load Configuration	Browse and click on the “Load Configuration” to load the configuration files to the local hard drive.
Restore Factory Defaults	Click on “Restore Factory Defaults” to restore the factory defaults. You may browse and load the configuration file. This option will restore the pre-configured or saved settings
Reboot Device	Click on “Reboot Device” to reboot the device. This option will restart the camera.

- Change the System Setting — Update Firmware.

Please follow the steps below to update the firmware through the network as necessary.

1. Click on the **Firmware Upgrade** button on the left side of the “Date and Time” page to enter the “Firmware Upgrade” page.

The screenshot shows the web interface of an APPRO LC-6740B device. The top header bar is blue with the APPRO logo on the left, the model number 'LC-6740B' in the center, and links for 'Live Video', 'Setup', 'Wizard', and 'Help' on the right. Below the header is a navigation menu with tabs: 'Image', 'Network', 'System', 'Application', 'Storage', and 'Status'. The 'System' tab is selected. On the left side of the 'System' tab, there is a vertical menu with options: 'Time and Date', 'LED', 'User', 'Maintenance', 'Upgrade Firmware' (highlighted), and 'Logout'. The main content area is titled 'UPGRADE FIRMWARE'. It contains a section 'FIRMWARE INFORMATION' with two rows: 'Current Firmware Version: 1.01' and 'Current Product Name: LC-6740B'. Below this is another section titled 'UPGRADE FIRMWARE' with a 'File Path:' label, a 'Browse...' button, the text 'No file selected.', and an 'Upload' button.

2. Click on the “Browse...” button to select the UPDATE.BIN file which was copied into your computer.
3. Click on the “Upload” button.

Note

DO NOT power off the IP camera while updating firmware.

Don't interrupt the process while the unit is updating itself.

Please make sure that the UPDATE.BIN file is appropriate to the model of the unit. Updating with the wrong UPDATE.BIN file may cause physical damage to the device.

The Temporary Internet Files (or cache) folder contains Web page content that is stored in your hard disk for quick viewing. We suggest deleting the Temporary Internet Files immediately after updating the firmware. To delete the files in the Temporary Internet Files folder, follow these steps:

1. Quit Internet Explorer and quit any instances of Windows Explorer.
2. Click **Start**, click **Control Panel**, and then double-click **Internet Options**.
3. On the **General** tab, click **Delete Files** under **Temporary Internet Files**.
4. Select the **Delete all offline content** check box in the **Delete Files** dialog box, and then click **OK**.
5. Click **OK**.

5.1.3.5 Change the Application Setting

Please follow the steps below to change the application setting through the network as necessary.

- Change the Application Setting —Language Setting.

Please follow the steps below to change the Language setting via the network as necessary.

1. Click on the **Language** button on the left side to enter the “Language Setting” page.

APPRO

LC-6740B

Live Video | Setup | Wizard | Help

Image	Network	System	Application	Storage	Status
Language	LANGUAGE SETUP				
Motion Detection	LANGUAGE SETTING				
ePTZ	Language: English(English) ▼				
Event	<div>Submit</div>				
Logout					

You have an option as to which language to use.

2. Choose your selected language and click **Submit** to set it.

- Change the Application Setting —Motion And PIR.

Please follow the steps below to enable changes in the motion detection function of the alarm through the network as necessary.

Set the motion detection:

1. Click on the **Motion and PIR** button on the left side of the Alarm to enter the “Motion Detection” page.

2. Click and drag the mouse across a targeted zone to draw a rectangle on the image.

Note

You can set more than one targeted zone depending on your requirement.

3. Enables / disables the motion detection function.
4. Click on the **Submit** button to submit the new setting of the recording.



Description of function keys:

Enable Video Motion	Select this option to enable motion detection for your camera.
Sensitivity	The sensitivity bar allows you to specify how much movement is required to trigger the motion detection.
Percentage	Adjusting the percentage allows you to set a requirement on how much of the motion window must be filled by movement. For example: If you set this function at 50%, then the selected window must be half filled by a moving object before it triggers motion detection.
Enable PIR	When this option is selected, use PIR (passive infrared) to detect motion.

- Change the Application Setting —ePTZ.

This screen allows you to set preset points for the ePTZ function of the camera, which allows you to look around the camera's viewable area by using a zoomed view. Presets allow you to quickly go to and view a specific part of the area your camera is covering, and you can create preset sequences, which will automatically change the camera's view between the different presets according to a defined order and timing you can set.

1. Click on the **ePTZ** button on the left side of the Alarm to enter the “Motion Detection” page.

APPRO 		LC-6740B		Live Video Setup Wizard Help	
Image	Network	System	Application	Storage	Status
<div> <div> Language Motion Detection ePTZ Event Logout </div> <div> <h2>EPTZ</h2> <h3>PRESET CONTROL</h3> <div>  <div> Video Profile : <input type="text" value="1"/> ePTZ Speed : <input type="text" value="5"/> <div> <div>▲</div> <div>◀ ◻ ▶</div> <div>▼</div> </div> </div> </div> </div> <h3>PRESET</h3> <div> Preset Name : <input type="text"/> <div> Add Rename </div> <p>support (0~9,A~Z,a~z,-,*,/,_)</p> Preset List : --Preset List-- ▾ <div> GoTo Remove </div> </div> <h3>PRESET SEQUENCE</h3> <div> Preset Name : Dwell Time <div> <div> <div></div> <div>▲</div> <div>×</div> <div>▼</div> </div> <div> Preset List : --Preset List-- ▾ <div> Add </div> </div> </div> <div> Dwell Time : <input type="text" value="10"/> <div> Update seconds[3~30] </div> </div> </div> </div>					

Description of function keys:

Video Profile:	This selects which video profile to use.
ePTZ Speed:	You may select a value between 0 and 64. 0 is the slowest and 64 is the fastest.
Arrow Buttons and Home Button:	Use these buttons to move to a specific part of the viewing area, which you can then set as a preset. Click the Home button to return to the center of the viewing area.

Input Preset Name:	Enter the name of the preset you want to create, then click the Add button to make a new preset. If an existing preset has been selected from the Preset List, you can change its name by typing in a new name, then clicking the Rename button. Using the Pan, Tilt and Zoom (PTZ) controls, move the camera view to the required position and simply by selecting the preset's name.
Add	Saves a preset position in the camera.
GoTo	Tests the preset the preset position.
Preset List:	Click this drop-down box to see a list of all the presets that have been created. You can select one, then click the GoTo button to change the displayed camera view to the preset. Clicking the Remove button will delete the currently selected preset.
Preset Sequence:	<p>This section allows you to create a preset sequence, which automatically moves the camera's view between a set of preset views. A preset sequence is an automated series of camera movements from one preset position to another. A guard tour can be set up to display the video streams from different preset positions in a pre-determined order, and for configurable time periods.</p> <p>Add: Set up a new preset sequence, Modify to change, and Remove to remove an existing preset sequence.</p>

- Change the Application Setting —Event.

In this section, you can configure and schedule the recording setting for your IP camera.

Click on “Add” to enter the setting pages of the Server, Media, Event and Recording to make the advanced settings. Or click on “Delete” to erase the settings.

APPRO LC-6740B Live Video | Setup | Wizard | Help

Image Network System Application Storage Status

Language Motion Detection ePTZ **Event** Logout

EVENT SETUP

SERVER

Name	Type	Address/Location
<input type="button" value="Add"/>	<input type="button" value="▼"/>	<input type="button" value="Delete"/>

MEDIA

Name	Type	Source
<input type="button" value="Add"/>	<input type="button" value="▼"/>	<input type="button" value="Delete"/>

EVENT

Name	Status	Sun	Mon	Tue	Wed	Thu	Fri	Sat	Time	Trigger
<input type="button" value="Add"/>	<input type="button" value="▼"/>									

RECORDING

Name	Status	Sun	Mon	Tue	Wed	Thu	Fri	Sat	Time	Source	Destination
<input type="button" value="Add"/>	<input type="button" value="▼"/>										

The Event Setup page includes 4 different sections: Server, Media, Event and Recording.

1. To add a new item - "event, server or media," click Add.
2. To delete the selected item from the pull-down menu of event, server or media, click Delete.
3. Click on the item name to enter the window for modifying.

Note

You can add up to five servers, five media fields, three event schedules, and two recording schedules.

Server:

Click on the **Add** button in the Server column to enter the “Server” setting page.

APPRO

LC-6740B

Live Video | Setup | Wizard | Help

Image	Network	System	Application	Storage	Status
-------	---------	--------	-------------	---------	--------

Language
Motion Detection
ePTZ
Event
Logout

SERVER

SERVER TYPE

Server Name:

☒ Email

Sender email address

Recipient email address

Server address

User name

Password

Port

25

☐ This server requires a secure connection (StartTLS)

☐ FTP

Server address

Port

21

User name

Password

Remote folder name

☐ Passive mode

☐ Network storage

Network storage location

(for example: \\my_nas\disk\folder)

Workgroup

User name

Password

Primary WINS server

☐ SD Card

Test

Submit

Don't Submit

1. Enter the Server name, the unique name for a server. There are four kinds of servers supported. They are email server, FTP server, HTTP server and network storage.
2. Set the details of the Email. **"Sender email address"**: The email address of the sender.
"Recipient email address": The email address of the recipient.
3. Set the details of the FTP. **"Remote folder name"**: An authorized folder on the external FTP server. The string must conform to that of the external FTP server. Some FTP servers cannot accept a preceding slash symbol before the path without virtual path mapping. Refer to the instructions for the external FTP server for details. The folder privilege must be open

for uploading. "**Passive Mode**": Check it to enable the passive mode in transmission.

4. Set the details of the Network storage. Only one network storage is supported. "**Network storage location**": The path to upload the media. "**Workgroup**": The workgroup for network storage.
5. Click on the SD card to activate the function. Use the SD card for recording media.
6. Click on "Submit" to save or click on "Don't Submit" to go back to the Event main page.

Server settings:

- (1) Click **Add** under the Sever column on Event Settings page to open the Server setting page. On this page, you can specify where the notification has been sent when a trigger is activated. A total of 5 server settings can be configured.

Note

The maximum server settings amount is five, however, you can set the Network storage or the SD card for only one.

- (2) Enter the Server Name for the server setting.
- (3) Select the Server Type. There are four choices of server types available: Email, FTP, Network storage and SD card. Select one of the server types.
 - **Email:** Select to send the media files via the email when a trigger is activated.
 - (a) Sender email address: Enter the email address of the sender.
 - (b) Recipient email address: Enter the email address of the recipient.
 - (c) Server address: Enter the domain or IP address of the email server.
 - (d) User name: Enter the user name of the email account if necessary.
 - (e) Password: Enter the password of the email account if necessary.
 - (f) Port: The default email server port is 25. You can also manually set another port.
 - (g) To verify if the email setting is correctly configured, click the Test button. The result will be shown in above this setting page (TEST OK or TEST ERROR).
If successful, you will receive an email indicating the result.
 - (h) Click Submit to activate the setting.

- **FTP:** Select to send the media files to an FTP server when a trigger is activated.
 - (a) Server address: Enter the domain or IP address of the FTP server.
 - (b) Port: The default FTP server port is 21. It can also be assigned to another port number.
 - (c) User name: Enter the login name of the FTP account.
 - (d) Password: Enter the password of the FTP account.
 - (e) Remote folder name: Enter the folder where the media file will be placed. If the folder name does not exist, the IP camera will create one on the FTP server.
 - (f) Passive mode: Most firewalls do not accept new connections initiated from external requests. If the FTP server supports passive mode, select this option to enable passive mode FTP and allow data transmission to pass through the firewall.
 - (g) To verify if the FTP setting is correctly configured, click the Test button. The result will be shown in above this setting page (TEST OK or TEST ERROR).
 - (h) Click Submit to activate the setting.

- **Network storage:** Select to send the media files to a network storage location when a trigger is activated. Please fill in the information for your server.
 - (a) Network storage location: Enter the network storage path (\\ server name or IP address\ folder name).
 - (b) Workgroup: Enter the workgroup name for the network storage server.
 - (c) User name: Enter the user name for the server.
 - (d) Password: Enter the password for the server.
 - (e) Primary WINS server:
 - (f) To verify if the storage setting is correctly configured, click the Test button. The result will be shown in above this setting page (TEST OK or TEST ERROR).
 - (g) Click Submit to activate the setting.

- **SD card:** Select to send the media files to an SD card when a trigger is activated.
 - (a) Insert your SD card first.
 - (b) To verify if the storage setting is correctly configured, click the Test button.
The result will be shown in above this setting page (TEST OK or TEST ERROR).
 - (c) Click Submit to activate the setting.
- (4) When completed, click Submit to enable the settings to exit this page. The new server settings will appear on the Event Settings page.

Note

To remove a server setting from the list (Application> Event>), select a server name from the drop-down list and click Delete.

Note that only when the server setting is not being applied to an event setting (Application> Event> Event> The "Action" option) can it be deleted or the camera won't take any action when a trigger is activated.

Media:

Click on the **Add** button in the Media column to enter the "Media" setting page.

APPRO LC-6740B Live Video | Setup | Wizard | Help

Image Network System Application Storage Status

Language
Motion Detection
ePTZ
Event
Logout

MEDIA

MEDIA TYPE

Media name:

☒ Snapshot

Source:

Send pre-event image(s) [0~3]

Send post-event image(s) [0~7]

File Name Prefix:

☐ Add date and time suffix to file name

☐ Video Clip

Source:

Pre-event recording: seconds [0~3]

Maximum duration: seconds [1~100]

Maximum file size: kbytes[100~5000]

File Name Prefix:

☐ System log

1. Enter the Media name, the unique name for media. There are three kinds of media: snapshot, video clip and system log.

2. Set the details of the Snapshot.

"Source": Select the video source.

"Send Pre-event images": The number of pre-event images.

"Send Post-event images": The number of post-event images.

"File name prefix": The prefix name will be added on the file name of the snapshot images.

"Add date and time suffix to file name": Check it to add timing information as file name suffix.

3. Set the details of the Video Clip.

"Source": Select the video source.

"Pre-event recording": The interval of pre-event recording in seconds. There are two limitations for video clip file.

"Maximum duration": The maximum recording file duration in seconds.

"Maximum file size": The maximum file size would be generated.

4. Click on the System log to activate the function.
5. Click on "Submit" to save, or click on "Don't Submit" to go back to the Event main page.

Media settings:


- (1) Click **Add** under the Media column on Event Settings page to open the Media setting page. On this page, you can specify the type of media that will be sent when a trigger is activated. A total of 5 media settings can be configured.
- (2) Enter the Media Name for the media setting.
- (3) Select the Media Type. There are three choices of media types available: Snapshot, Video Clip and System log. Select one of the media types.
 - **Snapshot:** Select to send snapshots when a trigger is activated.
 - (a) Source: Select to take snapshots from the video profile.
 - (b) Send pre-event image(s) [0~4]: The IP camera has a buffer area; it temporarily holds data up to a certain limit. Enter a number to decide how many images to capture before a trigger is activated. Up to 4 images can be generated.
 - (c) Send post-event image(s) [0~7]: Enter a number to decide how many images to capture after a trigger is activated. Up to 7 images can be generated.

Note

For example, if both the Send pre-event images and Send post-event images are set to 4, a total of 8 images are generated after a trigger is activated.

- (d) File Name Prefix: Enter the text that will be appended to the front of the file name.

For example, the file name will be in this form:

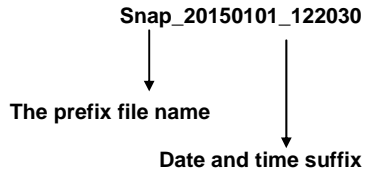


The format is: YYYYMMDD_HHMMSS

- (e) Add date and time suffix to file name: Select the option to add the date/ time suffix to the file name.
- (f) Click Submit to activate the setting.

Video Clip: Select to send video clips when a trigger is activated.

- (a) Source: Select to record video clips from the video profile.
- (b) Pre-event recording: The IP camera has a buffer area; it temporarily holds data up to a certain limit. Enter a number to decide the duration of recording before a trigger is activated. Up to 4 seconds can be set.
- (c) Maximum duration: Specify the maximum recording duration in seconds. Up to 100 seconds can be set.

NOTE: For example, if pre-event recording is set to 4 seconds and the maximum duration is set to 10 seconds, the IP camera continues to record for another 5 seconds after a trigger is activated.

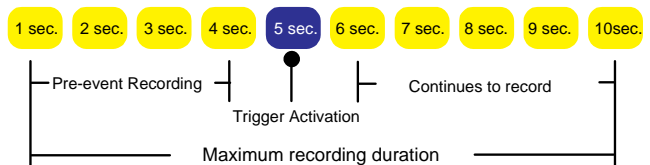

- (d) Maximum file size: Specify the maximum file size allowed.
- (e) File Name Prefix: Enter the text that will be appended to the front of the file name.
- (f) Click Submit to activate the setting.

- **System log:** Select to send a system log when a trigger is activated. Click Submit to activate the setting.

- (4) When completed, click Submit to enable the settings to exit this page. The new media settings will appear on the Event Settings page.

Note

To remove a media setting from the list (Application> Event>), select a media name from the drop-down list and click Delete.

Note that only when the media setting is not being applied to an event setting (Application> Event> Event> The "Attached media" item) can it be deleted or you can't get the images/ logs when a trigger is activated.

Event:

Click on the **Add** button in the Event column to enter the “Event” setting page.

APPRO LC-6740B Live Video | Setup | Wizard | Help

Image Network System Application Storage Status

Language
Motion Detection
ePTZ
Event
Logout

EVENT

EVENT

Event name:

☐ Enable this event

Priority: normal ▼

Delay for 10 seconds before detecting next event [for motion detection and digital input]

TRIGGER

☒ Video motion detection

☐ Periodic
Trigger every 1 minutes

☐ System boot

☐ Network Loss

EVENT SCHEDULE

☒ Sun ☒ Mon ☒ Tue ☒ Wed ☒ Thu ☒ Fri ☒ Sat

Time

☒ Always

☐ From 00 ▼ 00 ▼ To 23 ▼ 59 ▼

Submit Don't Submit

1. Enter the Event name. Checkmark the “Enable this event” box and activate the function.

Then set the Priority and the Source from the drop-down list.

“Priority”: The event with higher priority will be executed first.

2. Select the event trigger mode.

“Video motion detection”: Select the windows which need to be monitored.

“Periodic”: The event is triggered in specified intervals. The unit of trigger interval is a minute.

“Digital input”: The event is triggered when the DI status is changed by an external device.

“System boot”: The event is triggered when the system boots up.

“Network Loss”: The event is triggered when the network disconnect.

3. Set the recording schedule time.
4. Set the Trigger D/O of activating the action. Check it to trigger digital output for specific

seconds when an event is triggered.

5. Click on “Submit” to save or click on “Don’t Submit” to go back to the Event main page.

Event settings:

- (1) Click **Add** under the Event column on Event Settings page to open the Event setting page.
On this page, you can arrange three parts –Trigger, Event Schedule, and Action to set an event. A total of 3 event settings can be configured.
- (2) Enter the Event Name for the event setting.
- (3) Select “Enable this event” option to enable the event setting.
- (4) Set the event priority from: “normal”, “high” and “highest”. Events with a higher priority will be executed first.
- (5) Enter the duration in seconds to pause motion detection after a motion is detected (for the trigger types - motion detection and digital input – use only).
- (6) An event is an action initiated by a user-defined trigger source; it is the causal arrangement of the following three parts: Trigger, Event Schedule, and Action. Set the event details of each part.
 - **Trigger:** This option defines when to trigger the IP camera. The trigger source can be configured to use the IP camera’s built-in motion detection mechanism, periodic, external digital input devices or system boot. There are several choices of trigger sources as shown below.
 - (a) Video motion detection: This option makes use of the built-in motion detection mechanism as a trigger source. To enable this function, you need to configure a motion detection windows first.

Note

For example, when the event status is on, once an event is triggered by motion detection, the IP Camera will automatically send snapshots, video clips or System log via the server type as your settings.

- (b) Periodic: This option allows the IP camera to trigger periodically for every other defined minute(s). UP to 99999 minutes.
- (c) Digital input: This option allows the IP camera to use an external digital input

device or sensor as a trigger source. Depending on your application, there are many choices of digital input devices on the market which helps to detect changes in temperature, vibration, sound, and light, etc.

- (d) **System boot:** This option triggers the IP camera when the power to the IP camera is disconnected.
- (e) **Network Loss:** This option triggers the IP camera when the network to the IP camera is disconnected.

- **Event Schedule:** Specify the period for the event.

- (a) Select the days of the week.
 - (b) Set the recording schedule in the 24-hour time format.

- **Action:** Define the actions to be performed by the IP camera when a trigger is activated.

- (a) **Trigger D/O for ~ seconds:** Select this option to turn on the external digital output device when a trigger is activated. Specify the length of the trigger interval in the text box.
 - (b) If you want to set an event with recorded video or snapshots, it is necessary to configure the server and media settings first so that the IP camera will know what action to take (such as which server to send the media files to) when a trigger is activated.

Checkmark the one of the Server Names which you have set already, then select the Attached media (the media name) from the drop-down list.

- (7) When completed, click Submit to enable the settings to exit this page. The new event settings will appear on the Event Settings page.

Note

The new event settings / server settings / media settings will appear in the event drop-down list on the "Application> Event>" page.

Recording:

Click on the **Add** button in the Recording column to enter the “Recording” setting page.

APPRO LC-6740B Live Video | Setup | Wizard | Help

Image Network System Application Storage Status

Language
Motion Detection
ePTZ
Event
Logout

RECORDING

RECORDING

Recording entry name:

☐ Enable this recording

Priority:

Source:

RECORDING SCHEDULE

☒ Sun ☒ Mon ☒ Tue ☒ Wed ☒ Thu ☒ Fri ☒ Sat

Time

☒ Always

☐ From To

RECORDING SETTINGS

Destination

Total cycling recording size: Mbytes [200~2000000]

Size of each file for recording: Mbytes [10~50]

File Name Prefix:

1. Enter the Recording entry name. Checkmark the “Enable this recording” box and activate the function. Enable this option if you want to upload the recording to a shared folder in the network. Then set the Priority and the Source from the drop-down list.
2. Set the recording schedule time. Select the day(s) according to when you want the camera to make a video clip.
3. Set the details of the recorded file.
“Always”: This enables the camera to make video clips continuously.
“From”: The time range specified for the video clip.
4. Click on “Submit” to save or click on “Don’t Submit” to go back to the Event main page.

Record settings:

- (1) Click **Add** under the Record column on Event Settings page to open the Record setting page. In this page, you can define the recording source, recording schedule and recording capacity. A total of 2 recording settings can be configured.
- (2) Enter the Record entry name for the event setting.
- (3) Select "Enable this recording" option to enable the recording setting.
- (4) Select the recording priority from: "normal", "high" and "highest". Recording with a higher priority will be executed first.
- (5) Select the recording source from the drop-down list (profiles).
- (6) Specify the recording schedule and the recording settings.
 - **Recording Schedule:**
 - (a) Select the days of the week.
 - (b) Set the recording schedule in the 24-hour time format.
 - **Recording Settings:**
 - (a) Destination: You can select the SD card or SAMBA (Network storage) that was set up for the recorded video files.
 - (b) Total cycling recording size: When the maximum capacity is reached the value you set, the oldest file will be overwritten by the latest one. The reserved amount is reserved for cyclic recording to prevent malfunction. The limited value is 200~200000000 Mbytes.
 - (c) Size of each file for recording: Set the maximum file size of each recording video files.
 - (d) File Name Prefix: Enter the text that will be appended to the front of the file name.
- (7) When completed, click Submit to enable the settings to exit this page. The new media settings will appear on the Event Settings page.

5.1.3.6 Change the Storage Setting

Please follow the steps below to change the SD card setting through the network as necessary.

- Change the SD card Setting.

Please follow the steps below to change the setting via the network as necessary.

1. Click on the “storage” button at the top of the Setup page to enter the “SD Card” screen.

APPRO LC-6740B Live Video | Setup | Wizard | Help

Image Network System Application Storage Status

SD Card Logout

SD CARD

SD Card: / SD Status: Ready

Files per Page: 10 Refresh 1 of 1

<input type="checkbox"/> Delete	File	Number of files	Size
<input type="checkbox"/>	Video	1	
<input type="checkbox"/>	Picture	1	
<input type="checkbox"/>	test.txt		1

Format SD Card

Total: 3989864kB, Used: 36kB, Free: 3989828kB

Submit

2. The SD Card page contains two image modes, the Video and the Picture.
3. Click “Video” or “Picture” to enter its sub year-month folder.
4. Click to enter its sub date folder.
5. Click the desired file to display the images therein.
6. Each file can be deleted by checking and pressing the OK button.

5.1.3.7 Status

- The device information.

This page displays all the information about your device and network connection.

Click on the “Device info” button of the Status page to enter the “Device info” screen.

APPRO

LC-6740B

[Live Video](#) | [Setup](#) | [Wizard](#) | [Help](#)

Image	Network	System	Application	Storage	Status
-------	---------	--------	-------------	---------	--------

Device Info

Log

Logout

DEVICE INFO

INFORMATION

Model Name	LC-6740B
Device Name	LC-6740B
Time & Date	Mon Aug 18 04:57:24 2014
Firmware Version	1.01
HTML Version	3.1.60
Activex Version	2.0.0.67
MAC Address	00:11:22:33:44:71
IP Address	192.168.0.100
IP Subnet Mask	255.255.252.0
Default Gateway	0.0.0.0
Primary DNS	0.0.0.0
PPPoE	Disable
DDNS	Disable
TV Output Mode	NTSC

- The device information.

This page displays the log information of your camera.

APPRO LC-6740B Live Video | Setup | Wizard | Help

Image Network System Application Storage Status

Device Info Log Logout

SYSTEM LOG

CURRENT LOG

```
Aug 18 03:11:23 syslog: LC-6740B ACQUIRE DHCP IP 192.168.0.100
Aug 18 03:11:23 syslog: LC-6740B ACQUIRE DHCP IP 192.168.0.100
Aug 18 03:12:06 syslog: admin LOGIN OK FROM 192.168.1.83
Aug 18 03:12:06 syslog: admin LOGIN OK FROM 192.168.1.83
Aug 18 03:22:26 syslog: admin LOGIN OK FROM 192.168.1.83
Aug 18 03:22:38 syslog: admin FROM 192.168.1.83 SET PROFILE 2 Frame
Size 320x176
Aug 18 03:22:38 syslog: admin FROM 192.168.1.83 SET PROFILE 2 Viewer
window area 320x176
Aug 18 03:22:40 syslog: admin FROM 192.168.1.83 SET VIDEO CODEC Need
Reset
Aug 18 04:57:00 syslog: admin LOGIN OK FROM 192.168.2.151
Aug 18 05:09:11 syslog: admin LOGIN OK FROM 192.168.2.151
Aug 18 05:17:56 syslog: admin FROM 192.168.2.151 Restore Factory
Default
Aug 18 05:18:13 syslog: SYSTEM BOOTING
Aug 18 05:18:13 syslog: SYSTEM SET IR LIGHT OFF
Aug 18 05:18:13 syslog: LC-6740B ACQUIRE DHCP IP 192.168.0.100
Aug 18 05:18:55 syslog: admin LOGIN OK FROM 192.168.2.151
```

Clear Download

1. Click on the "Device info" button of the Status page to enter the "Device info" screen.
2. Click on the "Clear " to erase all of the logs. You may also download the information by clicking "Download".

PPPoE & DDNS

Using the PPPoE

1. Install the XDSL software (obtained from your ISP dealer) in your PC.
2. Search your IP camera's IP address: you can connect the IP camera and the Video monitor.
The monitor screen will show the IP address on its right side.
3. Turn off the DHCP function (of the IP camera) if it is "ON".
4. Installing an IP address in your PC or notebook.

Desktop → Move the mouse focus to the Network neighborhood and click the right key of the mouse → Choose the properties → Choose your local connection → Choose the properties and select the configuration → Select the TCP / IP → Choose the properties → Enter the IP address in a four-part formula, for example "192. 168. 1.101" (the first three parts must be identical to the above numbers, only the last part can be changed to your own number, which must never exceed 255) → Click on the mask and the mask input, namely "255. 255. 255. 0" (a fixed formula) → Click "OK" → Click "OK".

5. Desktop → Choose IE browser → Enter the IP camera IP address in the URL (check step # 2 above) → Enter → IP camera images will appear.

PPPoE Settings

1. Enter the IP camera home page → Choose the network → Enter "User Name: Device ID" and "Password: 9999" → Click "OK".
2. Choose PPPoE → PPPoE mode: Select "ON" → Enter "Account" → Enter "Password" → Submit → Unplug the power connection.
3. Plug in the IP camera and it will receive an IP address from the ISP dealer (this IP address is dynamic --- every time you unplug and plug in again you'll get a new IP address).

Test: Go to the Internet.

1. Set your PC to enter the Internet.
2. Desktop → IE browser → Enter the IP camera IP address (the same address as in the PPPoE settings and step 3 above) → You can see the IP camera images.

DDNS settings

1. Check your IP camera's IP address (monitor) → open your IE browser → Use the address to connect to the IP camera or view the images → Choose the network → Enter "User name : DeviceID" and "Password : 9999" → Click "OK" .
2. Choose the "DDNS" → Click "Enable DDNS" → Enter the "DDNS host name", for example "abc123.homeip.net" → Enter "DDNS Account", for example "abc123" → Enter the "DNS Password", for example "7777" → Submit → The settings are now complete → Close the IE browser.
3. Open the IE browser again → Enter the Website address you just applied for, such as "abc123.homeip.net" → You can look at your IP camera images right away. The procedure is complete.

Note

These settings are only for your ADSL Dynamic IP configuration. If your configuration is fixed (true IP), you don't need to proceed with the PPPoE and DDNS settings. The DDNS is just for your convenience.

6 FREQUENTLY ASKED QUESTIONS

Question 1:

How do I view live images of the IP camera via the Internet Explorer on a Desktop PC or a laptop computers in a situation where there are no monitors?

◇To get the IP address of the IP camera without a monitor, use one of the following two methods to get the IP address: UPnP.

UPnP: Please refer to **APPENDIX 1**.

Question 2:

How do I activate UPnP?

1. Follow the default settings to set up the related settings, and connect the hardware.
2. Activate the Web browser and enter the IP camera's URL.
3. SETUP→Network button.
4. Select "Enable UPnP presentation".
5. Select "Enable UPnP port forwarding"; make the "Forwarding Port" setting.

Note

1. Follow step 4 above then turn on computer's "My Web Neighbors" and find the IP camera. Then click to go to the IP camera's home page.
2. Follow step 5 above and make the Route UPnP port forwarding setting.
3. Your computer can access an IP camera through a router by opening a port on the router (port forwarding) if the router is configured to a specific port. For example port "8080", you can enter the IP address as <http://xxx.xxx.xxx.xxx:8080> on the URL entry box of the web browser to access the IP camera.

Question 3:

How to change the Video Profiles 1 & 2?

- On Live page click Profiles 1 & 2.

Question 4:

How do I set up the motion detection area and its sensitivity?

1. Go to SETUP→Application button →Motion Detection button.
2. Select "Enable Video Motion".
3. Set up the target zone and setup the Sensitivity and Percentage.
4. Click the **Submit** button to submit the setting.
5. When a person or object moves within the target zone under a setting, the Motion Detection

will display the response signal in the Live Video and Video Out.

Question 5:

How do I use the DynDNS to connect the IP camera by using its Sub Hostname via the intranet?

◇Set the DDNS function

1. Click the **Network** button on the home page.
2. Click the **Dynamic DNS** button on the left side of the page to enter the "Dynamic DNS" page.
3. Click "Enable DDNS" to activate.
4. Enter the DDNS Host Name, DDNS Account and DDNS Password which you created in the www.dyndns.com website.
5. Click the **Submit** button to save the settings.

◇Set the PPPoE function

1. Click the Network button on the home page.
2. Click the PPPoE button on the left side of the page to enter the "PPPoE" page.
3. Choose "Enable" to activate the function.
4. Enter the Account and the Password which are provided by your ISP.
5. Click the Submit button to save the setting.

◇Use the Sub Hostname to view the IP camera

1. Click the URL block at the top of the computer screen.
2. Enter the DDNS Host Name of the IP camera into the URL block and press the "Enter" key to enter the login page.
3. Enter the user name and password.
4. Click the "OK" button and enter the home page of the IP camera.

Question 6:

How do I add or modify the users and their authority to use the IP camera?

◇Entering the setting page

1. Click the **System** button in the Setup page.
2. Click the **User** button on the left side of the page to enter the "USER" page.

◇Add a new user

1. Enter the user name, the password, the confirmed password and choose the authority level.

There are three levels of authority: Admin, Operator and Viewer.

Admin: The user who accesses with the admin name and password has the full rights to change the settings of the IP camera.

Operator: Has access to viewing and functionality.

Viewer: Has limited viewing rights.

2. Click the **Add/Modify User** button to submit the new user setting.

◇Modify the user

1. Click the user name you want to modify from the **USER LIST**.
2. Enter the password, the confirmed password and choose authority level.
3. Click the **Add/Modify User** button to submit new setting.

◇Delete a user

1. Click the user name you want to delete from the **USER LIST**.
2. Click the **Delete User** button.

Question 7:

How do I create the self-signed certificate manually?

1. Go to Setup→Network button →HTTPS button
2. Select “Enable secure HTTPS connection”.
3. Create certificate settings→ Create self-signed certificate manually→Create.
4. Fill in the relevant data in the text boxes titled Country, State or province, Locality, Organization, Organization Unit, Common Name & Validity; click “Create”.

Question 8:

How do I download the log list?

1. Click Setup→ Status →Log.
2. The display will show the log list page.
3. Click First Page, Previous 20 or Next 20 to view the recording list.
4. Click Download; select the file path, and download the recording list.

7 SPECIFICATIONS

Model	LC-6740B	
Camera	Lens	Fixed Focal Board Lens f:3.6mm F1.8.
	3-axis Angle (non-motorized)	Vertical: 30° ; Horizontal: 90° ; Rotational: 180°
	Wireless	IEEE 802.11n/b/g. (The Wi-Fi LC-6740B model only)
Image	Video Compression	H.264 / MJPEG.
	Resolution	- "4:3": 960x720, 800x592, 640x480, 480x360, 320x240. - "16:9": 1280x720, 800x448, 640x360, 480x272, 320x176.
	Frame Rate	NTSC: Maximum 30FPS (1280x720). PAL: Maximum 25FPS (1280x720).
	Video streaming	- Simultaneous H.264 and MJPEG. - Multi-profile: resolution / compression / frame rate / video quality.
	Profiles	2 (selectable)
	Image settings	- Adjustable image size, quality, and bit rate. - Flip & Mirror. - AGC, AWB. - Time stamp and text caption overlay. - Privacy masks. - Exposure Mode.
	Video management software	SDK, including HTTP-API / ActiveX / ONVIF.
Audio	Audio streaming	Two-way.
	Compression	G.711u
	Audio bit rate	G.711u 64kbps
	Inputs / outputs:	Build-in Microphone & Speaker (5M).
Network	Security	Multi-level password protections, IP address filtering, HTTPS encryption, User access log.
	Wireless	IEEE 802.11b/n/g
	Protocols	IPv4, HTTPS, HTTP, TCP, UDP, RTP/RTCP/ RTSP, DHCP, NTP, FTP, SMTP, UPnP, ICMP, ARP, DDNS, PPPoE, SAMBA.
	Users	Access by 10 simultaneous users.
	Firmware update	SD card / HTTP.

Alarm	Recording	SD card, SAMBA, FTP
	Pre-alarm recording	Yes.
	Advanced motion	512 zones. Sensitivity: 0 - 100 %.
	Trigger	Motion Detection Schedule Alarm input Ethernet loss
	Notification	SD card recording, SMTP, FTP, HTTP, alarm output.
Connectors	RJ-45	10 BASE - T / 100 BASE -TX.
	DC jack	ϕ 6.5x2.0.
	Reset	Reset for factory default.
	Local storage device	Micro SD card slot
General	LED indicators	Network / Power/ WPS
	Buttons	Reset/ WPS
	Power consumption	≤ 10W
	Power	- 12V DC (DC power jack). Approx. 6 W. - PoE: IEEE802.3af compliant 802.3af. Class 2
	OS	Linux 2.6 kernel.
	Operating conditions	-0°C to 50°C (32°F to 122°F)
	Approval	CE, FCC, RoHS.
	Dimensions	60 x 107 mm
	Package Weights	710g.
	Accessories included	- Quick Installation Guide. - CD x 1 (includes CMS & User's Manual). - Power adapter: (Input: 100-240 VAC, 50 / 60 Hz, Output: 12VDC, 1.5A). - RJ-45 cable x 1

* Design and specifications are subject to change without notice.

Appendix: The Playback Utility Tool-- CMS

This section provides instructions for installing and using the **CMS** which is included with the device.

Introduction to the CMS

The **CMS** allows you to access many units of the device from a remote desktop or a laptop in a TCP/IP networking environment. It can perform the following functions.

- The recorded data of the camera will be automatically downloaded to the user's computer for backup.
- Views live images in a smooth sequential flow from an IP camera.
- Stores, searches, and reviews recorded video from a PC or an SD card quickly.

Note


Before you view images from a desktop, you need to have your device networked by obtaining a 10/100 base-TX Ethernet data cable (Standard RJ-45) to connect the device to your LAN/WAN. Now enter the main menu to set the IP address.

Install the CMS in your PC

Install the CMS from the supported CD-R.

1. Exit all applications currently running in the selected PC.
2. Insert the supported CD in the CD-ROM drive. The program will execute the installation automatically. Follow the on-screen instructions to proceed with the rest of the installation procedure as they appear.
3. After the installation is complete, pop up the **START** menu from your computer, and point to **Programs / CMS / CMS** to open up the program selection page as shown below. Click on the **CMS** tag to start the **CMS** program.


Start to use the CMS

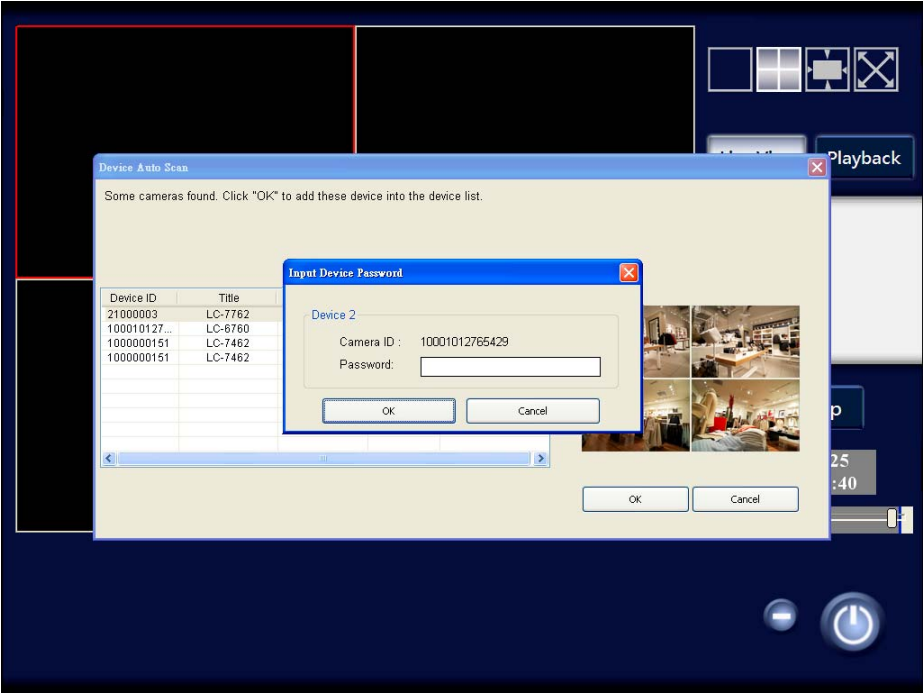

Once the connection has been established, the software will discover the connection of the devices in the LAN. The Device Auto Scan screen will display the connection of the all-type device. Please enter the password and click **OK** to add the new device.

View the video from a remote PC

Use the **CMS** to browse the video from a remote location.

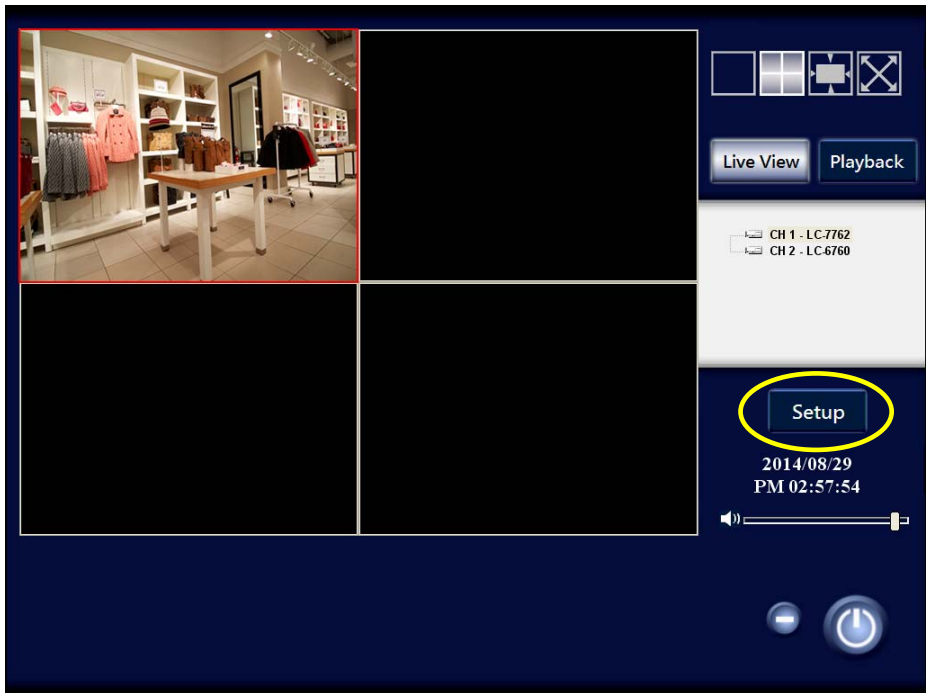

Search and add a new camera

The user can manually add a new connection of the camera in the LAN.


1. Click the **Setup** button to open the **Setting** window.
2. Click **Rescan**, then select and drag the camera into the quad-monitoring area. Click **OK** to confirm.

Note

You can use the mouse to switch from one image to another.

Note

You can remove the devices by dragging and dropping them into the recycle bin icon.

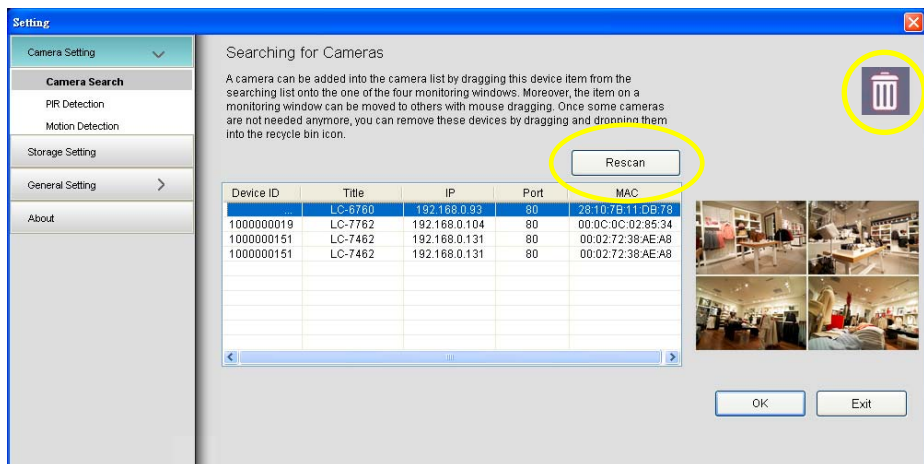

Operation

Live View

Once the connection has been established, you will see the Live View window (see the sample screen below).



1. The live view area.

Note

Pop-menu: You can use the mouse to move to each channel. Click the right key of the mouse to show a window. You can select "Full Screen", "Capture" or "Print".

Double-click the red frame live-viewing window to switch between single or quad channel modes.

2. Select the division mode of the live view area: Single View, Quad View, Actual View and Full Screen.
3. You can switch between these modes by clicking the Live View and Playback buttons.
4. The camera list.
5. Click the Setup button to open the Setting window.
6. Shows current local time and date.
7. The audio function: Click the audio icon to play the live audio and click once again to deactivate. Use the scroll bar to control the volume.
8. Click to minimize the window or turn off the software.

Playback

The Playback window (see the sample screen below).



1. The display area.

Note

Pop-menu: You can use the mouse to move to each channel. Click the right key of the mouse to show a window. You can select "Full Screen", "Capture" or "Print".

2. Select the division mode of the live view area: Single View, Quad View, Actual View and Full Screen.
3. You can switch between these modes by clicking the Live View and Playback buttons.
4. The system will search for a recorded video stored in the device. The dates marked in blue color indicate there are record videos on those days.
5. Click the Setup button to open the Setting window.
6. Shows current local time and date.
7. The audio function: Click the audio icon to play the playback audio and click once again to

deactivate. Use the scroll bar to control the volume.

8. The playback function bar.
9. You can click or pull the indicator on the scroll bar to the point you want to see.
10. Click to minimize the window or turn off the software.

Settings


Press the **Setup** button to enter the Setting page.

Camera Setting

Searching for Cameras


The user can manually add a new connection of the camera in the LAN.

1. Click the Setup button to open the Setting window.
2. Click Rescan, then select and drag the camera into the quad-monitoring area. Click OK to confirm.

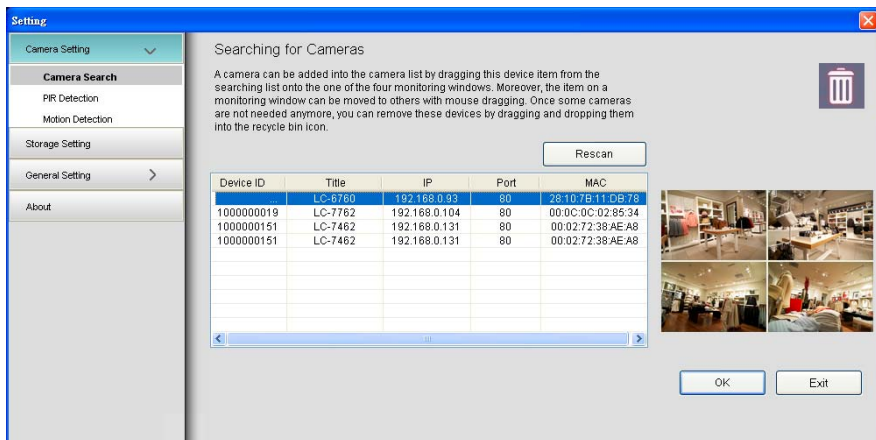

PIR Detection

Select the camera from the list to activate its PIR detection function. Click OK to confirm.

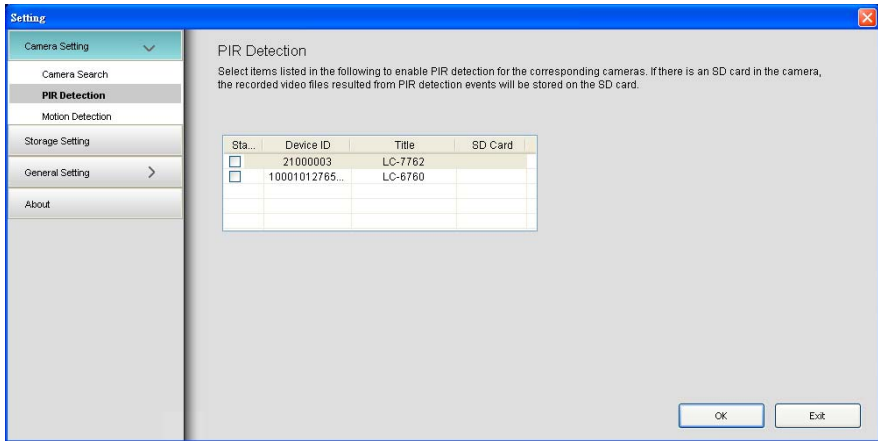


Motion Detection

1. Select the camera from the list to activate its motion detection function.
2. Click and drag the mouse across a targeted zone to draw a red rectangle on the image.
Every cell in the grid represents a detection area.
3. Click OK to confirm.


Note

Click the right key of the mouse to show a window. You can select "Select all", "Clear all" or "Restore".

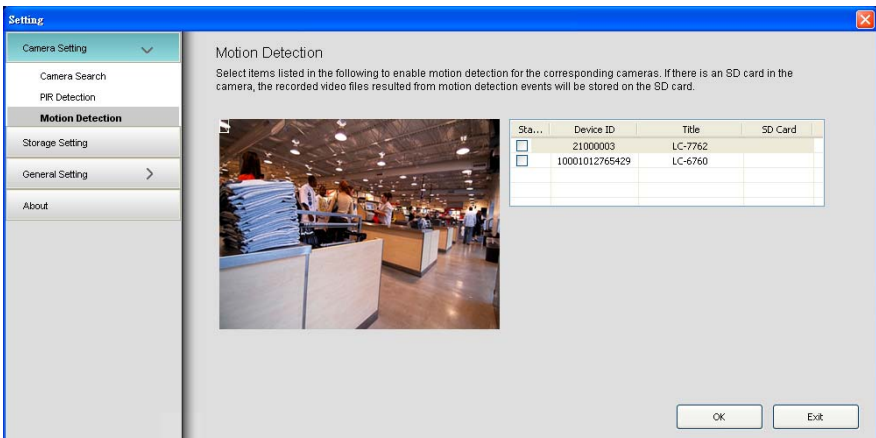

Storage Setting

Set the directory for saving the recording data. You can set the reserved hard disk space by using the scroll bar. Click on the **OK** button to submit the new setting of the storage setting.

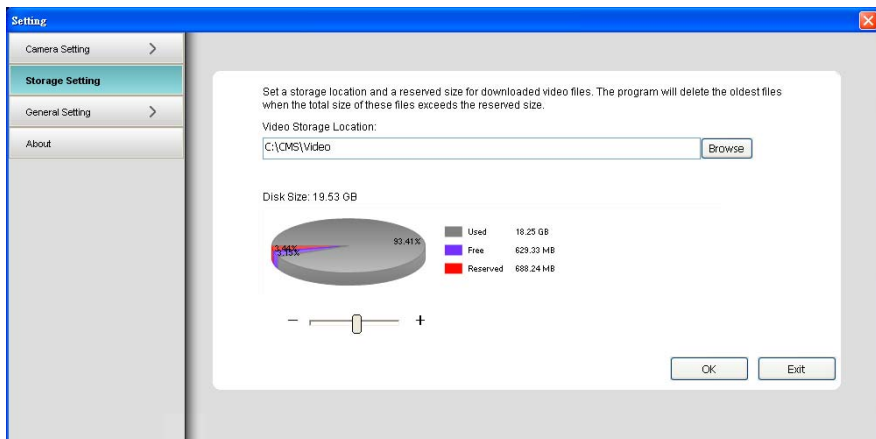


Note

The recorded data of the camera will be automatically downloaded to the user's computer for backup. The software will check the latest recorded date every two minutes and download the data automatically. When the recording data limit is reached, the new data will overwrite the oldest one.

General Setting

Language

You have an option as to which language to use. Choose your selected language from the drop-down list.

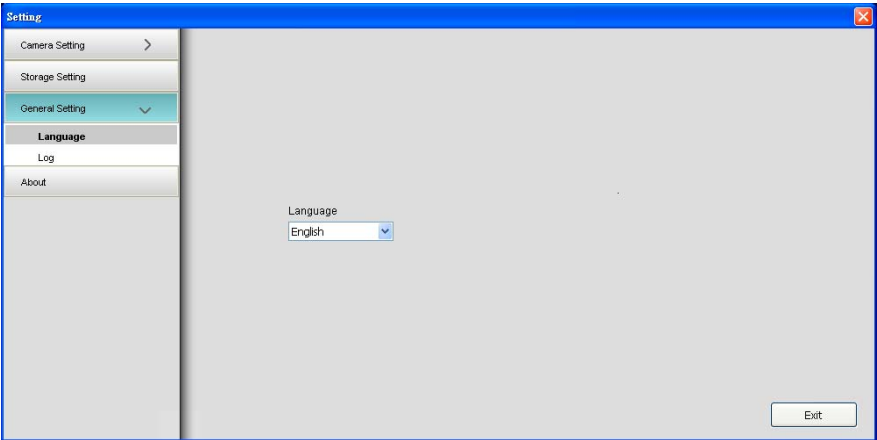

Log

This page displays the log information of your camera. Click on the “Clear” to erase all of the logs. You may also download the information by clicking “Save as”.

