

HOME AUDIO

2012/13

Digital Music Server, Blu-Ray Players, Home Cinema, Hi-Fi Stereo



Digital stream the new generation



 **Cambridge Audio**

MORDAUNT-SHORT

DynaQuest




Sonata NP30 Network Music Player

DAC	Wolfson WM8728 24-bit/96kHz
Digital Outputs	RCA, S/PDIF Co-ax and TosLink Optical (16-24 bit, 32-96kHz)
Audio Formats	WAV PCM 16-24 bit 32-96kHz, FLAC PCM 16-24 bit 32-96kHz, AIFF PCM (16 bit, 32-48kHz), WMA, MP3, AAC, HE AAC and AAC+, Ogg Vorbis
Streaming Protocols	RTSP (Real Time Streaming Protocol), MMS (Microsoft Media Server Protocol), HTTP (Hyper Text Transfer Protocol), Wi-Fi IEEE 802.11 b/g or n (2.4 GHz), Encryption WEP, WPA, WPA2
Wi-Fi	IEEE 802.3, 10 Base-T or 100 Base-T
Wi-Fi Ethernet	2 x USB 1.1, FAT32
USB	100-240V AC
Mains inlet voltage	67 x 270 x 285mm
Dimensions (HWD)	2.1kg
Weight	



Stream Magic 6 Upsampling Network Music Player

D/A Converters	Dual Wolfson WM8740 24-bit DACs
Digital filter	2nd Generation ATF2 up-sampling to 24-bit/384kHz. Linear Phase, Minimum phase or Steep modes.
Analogue filter	2-Pole Dual Differential Bessel Double Virtual Earth Balanced
Digital Inputs	S/PDIF 75 ohms or Toslink optical
USB	Local USB media
Digital Outputs	2 x USB 1.1, FAT32, NTFS
Analogue audio outputs	S/PDIF Co-axial and Toslink Optical 16-24 Bits, 32-96kHz
Audio Formats	Balanced XLR and unbalanced RCA analogue audio outputs
	WAV PCM 16-24 bit 32-96kHz, FLAC PCM 16-24 bit 32-96kHz, AIFF PCM (16 bit, 32-48kHz), Microsoft® Windows Media™ Audio (WMA 9 Standard) 32-320kbps
	MP3 (CBR or VBR) 16-320kbps
	AAC, HE AAC and AAC+ (CBR or VBR) 16-320kbps
	OGG Vorbis 32-320kbps
Streaming Protocols	RTSP (Real Time Streaming Protocol), MMS (Microsoft Media Server Protocol), HTTP (Hyper Text Transfer Protocol)
Wi-Fi	IEEE 802.11 b/g or n (2.4GHz connection used only)
Wi-Fi Encryption	WEP, WPA, WPA2
Ethernet	IEEE 802.3, 10 Base-T or 100 Base-T
Mains inlet voltage	100-240 VAC (switch mode)
Dimensions (HWD)	85 x 430 x 305mm
Weight	4 Kg

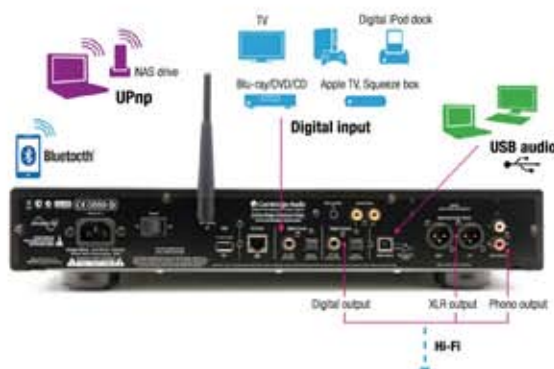

iD100 Digital iPod / iPhone Dock

AES/EBU	Signal type - Balanced Signal output level - 2V Output impedance - 110 ohms Connection - 3-pin XLR
S/PDIF	Signal type - Unbalanced Signal level - 500mV Output impedance - 75 ohms Connection - RCA / Phono
Video output	Composite/S-Video/ Component via 3-position toggle switch
PC sync interface	USB Type-B connection
Power adaptor input	12V DC, 2A
External IR input	Modulated RC5 via 3.5mm jack connection
Dimensions (HWD)	46 x 108 x 128mm
Weight	0.465kg



1. 電源連接器 (包括電源)
2. 色差、S-視頻、複合視頻輸出獲取最佳影像效果
3. 專業AES/EBU 平衡式 XLR 輸出
4. 光纖數碼輸出
5. S/P DIF 數碼同軸輸出插座以鍍金處理



引領你進入數位音樂的領域



Cambridge Audio

Rhapsody
PANDORA

UUUOL
RADIO

SiriusXM
SATELLITE RADIO

AUPEO!

BBC iPlayer
For radio

MP3tunes

LIVE 365.COM

24/384
UPSAMPLING



升頻取得更佳效果

搭配 DacMagic Plus 或 Stream Magic 6，ATF2 升頻技術可大幅提升您的隨身音樂設備/電腦無線分享的音樂音質，體現更多細節與低音，動態範圍也更寬廣。



DacMagic Plus Digital to Analogue Converter

D/A Converters
Digital filter

Analogue filter
Digital input word widths supported
Digital input sampling frequencies supported
Audio output up-sampling
Dimensions (HWD)
Weight

Dual Wolfson WM8740 24bit DACs
Analog Devices ADSP21261 DSP
upsampling to 24-bit/384kHz
2-Pole Dual Differential Bessel Double Virtual Earth Balanced
16-24bit
32kHz, 44.1kHz, 48kHz, 88.2kHz, 96kHz, 176.4kHz**, 192kHz
Fixed 24-bit/384kHz
52 x 215 x 191mm
1.2kg



DacMagic 100 Digital to Analogue Converter

D/A Converters
Digital input word widths supported
Digital input sampling frequencies supported
Dimensions (HWD)
Weight

Wolfson WM8742 24-bit DAC
16-24bit
32kHz, 44.1kHz, 48kHz, 88.2kHz, 96kHz, 192kHz
46 x 106 x 130mm
0.5kg



BT100 Wireless Audio Receiver

將您的智慧手機、平板電腦或個人電腦變成無線 Hi-Fi 的播放器！
BT100 無線音頻接收器與 DacMagic Plus/Stream Magic 6/NP30 連接，可以從您的蘋果 iPhone 手機、智慧手機、iPad、平板電腦、筆記型電腦以及任何支援藍牙的設備，將音樂無線傳輸至您的 Hi-Fi 音響或娛樂系統。



您的電影 • 我們的熱情



您唯一選擇的藍光 3D 播放器！

完美的影像只是故事的一部分，因為 651BD 的音頻性能跟其視頻功能一樣引人注目。

Cirrus Logic 的 DAC 和對音頻電路設計的專注保證無論是電影還是音樂都能播放出美妙的聲音。

651BD 不僅支援藍光 – 包括 3D 藍光光碟 – 它還支援 CD、HDCD、DVD 視頻、DVD 音頻和 SACD。



Azur 651BD 3D Blu-ray Disc Player

Disc Types:	Blu-ray (BD) including BD-3D, DVD, DVD-A, AVCHD, SACD, CD, HDCD, Kodak Picture CD, CD-R/RW, DVD±R/RW, DVD±R DL, BD-R/RE
Video output	2 x HDMI 1.4a, component video, composite video
Audio Outputs:	7.1 multichannel analogue RCA/Phono output, SPDIF coaxial and Toslink optical digital outputs
D/A Converters:	Cirrus Logic CS4382A 8 channel multi-DAC
Decoder	Mediatek MTK8530
Dimensions (H x W x D):	85 x 430 x 312mm with feet
Weight	5.0kg



Azur 751BD 3D Blu-ray Disc Player

Disc Types:	Blu-ray (BD) including BD-3D, DVD-Video, DVD-Audio, AVCHD, SACD, CD, HDCD, Kodak Picture CD, CD-R/RW, DVD±R/RW, DVD±R DL, BD-R/RE
Architecture	
Decoder	Mediatek MTK8530
Upsampler	Analog Devices ADSP-21261 32 bit SHARC(R) DSP running Anagram Technologies(TM) Q5 up-sampling to 24 bit/192kHz (All 10 channels)
D/A Converters:	5 x Wolfson WM8740 24/192kHz Digital to Analog converters
Video Scaler	Marvell DE2750 QDEO Video Scaler (on Primary output)
External storage	2 x USB 2.0, 1 x e-Sata
Analogue audio outputs	7.1 RCA/Phono Can be set for Stereo, 5.1 or 7.1 output Dedicated stereo RCA/Phono
Analogue video outputs	Composite Video (CVBS) Component (YCbCr/YPbPr)
Video frame rates	24Hz/50Hz/60Hz
Dimensions (H x W x D):	85 x 430 x 312mm
Weight:	5.0kg



環形變壓器與EI變壓器比較

我們致力於呈現完美音質，採用強大的環形變壓器。Cambridge Audio 是在 20 世紀 70 年代最早使用環形變壓器的製造商之一，今天依然如此。相比其他大部分製造商使用的價格更低廉的低檔 EI 變壓器，環形變壓器擁有以下優點：



- ✓ 輸至功放電路的高質量功率輸出，無波形信號削減，確保信號穩定
- ✓ 無變壓器噪音、嗡嗡或嗡嗡聲絕佳低音表現
- ✓ 高功率輸出，容許無載驅動性能要求高的大型喇叭以高音量輸出
- ✓ 功率儲備大，需要時可使變壓器達到高峰值
- ✓ 全面屏蔽內部及外部電干擾，維持功率及信號質量



更廉價的常見 EI 變壓器：

- ✗ 訊號器、不穩定
- ✗ 無屏蔽
- ✗ 噪音
- ✗ 無法驅動強大、性能要求高的喇叭

內部情況



動力十足——超靜音 X-Tract 散熱系統

需要一個分離系統？

適合客製化安裝，擁有完整 RS232 控制支援主動防護，後部面板配備一個紅外接收端口，提供可供進行各種操作的分離鏡。

超強功率

可支援 7.1 聲道環繞音響系統，音質有力、聲音突出而且充滿動感。而在立體聲模式，提供卓越發燒級音樂體驗。

業內頂尖及完善的設備

擁有多個 HDMI 輸入，可支援 3D 電視以及深色 (Deep Color) 傳遞，數位 RCA 訊號輸入，數位同軸及光纖接口，以及一個便利的前置 3.5mm 輸入接口。電子元件 (以及音質) 對於推動尤為敏感；因此我們採用低共模、雙學期尼金屬機箱，以盡量消除振動，確保從音源提取最佳聲音。

高效率的散熱系統

功能強大，設計精密，用途廣泛，而且一切集於這型優美典雅的機箱中，因此可以置於架子及支架的狹小空間，同時先進的 X-Tract™ 散熱系統保證在狹小空間內不會運行過熱。



Azur 551R 7.1 Home Cinema Receiver

Power Output	All Channels : 110 watts rms per channel, 6 ohms (two channels driven) All Channels : 90 watts rms per channel, 8 ohms (two channels driven) All Channels : 60 watts rms per channel, 8 ohms (all 7 channels driven)
HDMI	HDMI 1.4 EIA/CEA - 861D / HDCP 1.1 All audio modes supported except reception of native Direct Stream Digital (DSD). ARC and 3D-TV/deep colour pass through supported. CEC and HEC not supported.
Architecture	Cirrus Logic CS43122 24 Bit 192kHz capable DAC for Front Left & Right Cirrus Logic CS52526 24 Bit 192kHz capable CODEC for surround channels + 24 Bit 2 channel A/D conversion Cirrus Logic CS497004 dual 32 bit DSP
Dimensions (HWD)	110 x 430 x 340mm
Weight	10kg



Azur 651R 7.1 Home Cinema Receiver

Power output	175 watts rms per channel, 6 ohms (two channels driven) 140 watts rms per channel, 8 ohms (two channels driven) 100 watts rms per channel, 8 ohms (all 7 channels driven)
HDMI	HDMI 1.4, EIA/CEA - 861D, HDCP 1 ARC and 3D-TV/deep colour pass through supported.
Architecture	Cirrus Logic CS43122 24 Bit 192kHz capable DAC for Front Left & Right Cirrus Logic CS52526 24 Bit 192kHz capable CODEC for surround channels + 24 Bit 2 channel A/D Conversion Cirrus Logic CS497004 dual 32 bit DSP Anchor Bay ABT2010 scaler
Dimensions (HWD)	150 x 430 x 420mm
Weight	15.3kg



客製化安裝項目用 RS-232 5 X RCA 訊號輸入 (前部面板配備一個熱熱 RCA 連接) 7.1 前置輸出 7.1 Direct-in 直通插孔 喇叭連接 (最多達 7.1)

Azur 751R 7.1 Home Cinema Receiver

Power output	200 watts rms per channel, 6 ohms (two channels driven) 170 watts rms per channel, 8 ohms (two channels driven) 120 watts rms per channel, 8 ohms (all 7 channels driven)
HDMI	HDMI 1.4, EIA/CEA - 861D, HDCP 1.1, ARC and 3D-TV/deep colour pass through supported.
Architecture	Cirrus Logic CS43122 24 Bit 192kHz capable DAC for Front Left & Right Cirrus Logic CS52526 24 Bit 192kHz capable CODEC for surround channels + 24 Bit 2 channel A/D Conversion Cirrus Logic CS497004 dual 32 bit DSP Additional AD DSP performing 24bit/192kHz ATF Upsampling Anchor Bay ABT2010 scaler USB 1.0: 24-bit 44.1kHz, 48kHz, 96kHz USB 2.0: 16/24-bit 44.1kHz, 48kHz, 88.2kHz, 96kHz, 192kHz
Dimensions (HWD)	150 x 430 x 420mm
Weight	16.2kg



Cambridge Audio

處於數位音樂前沿的 最好的 DAC、CD 播放器和前級擴大機



Azur 851A Integrated Class XD amplifier

Power Output	120W RMS into 8 Ohms 200W RMS into 4 Ohms
Audio Inputs	2 sets of balanced XLR, 8 further RCA inputs
Audio Outputs	Preamp output, Record output
Max power consumption	800W
Dimensions (HWD)	115 x 430 x 385mm
Weight	15.0kg

優雅的全金屬設計



所以我們使用了超堅固的金屬外殼，以保證原件完全隔離、消除振動以實現最佳性能，金屬拉絲的前置面板呈現優雅外形。



CAP5保護系統

CAP5 (Cambridge Audio Protection 5) 能夠保護 851A 和其他與之連接的設備和音響，保證終極的可靠性，讓用戶高枕無憂。

- 過電流——保護喇叭以免使用過度
- 溫度保護——用於排風不好的情況
- 直流監測——預防最常見的用戶安裝錯誤
- 短路——監測連接錯誤的喇叭
- 削峰——將使用過度的聲音逐漸變小

Azur 851C Upsampling DAC, CD Player and Digital Pre-amplifier

D/A Converters	Dual Analog Devices AD1955 24 bit DACs
Digital filter	Analog Devices Black ADSP-BF532 32 bit DSP performing 2nd Generation ATF2 up-sampling to 24 bit 384kHz
S/N ratio, A weighted	> 113dB
Compatibility	USB 1.0 16-24 bit, 32-96kHz USB 2.0 16-24 bit, 32-192kHz Toslink 16-24 bit, 32-96kHz S/PDIF and AES/EBU 16-24 bit, 32-192kHz
Dimensions (H x W x D)	115 x 430 x 360 mm
Weight	10kg

高性能個性化 純音頻CD驅動器

其他廠商都樂於使用電腦的CD驅動器，而851C則充分利用我們自己生產的純音頻CD驅動器。它與我們全新的S3定制CD伺服相結合，使CD數據無誤讀取得到雙重保證。結合我們先進的升頻技術和ADI公司DAC，提供一個真正無與倫比的「勝於CD」的高保真體驗。



您知道嗎？

851C 擁有三個可選的濾波器（線性、最小和陡峭）讓用戶可以選擇他們最喜歡的聲音。



業內頂尖連接



除了5個RCA唱機輸入端，651A還具有USB音頻輸入端口，可以直接從電腦上接收文件，可以下載iTunes裡儲存的文件、網路電台的音頻流或來自如Spotify等雲端服務的文件。而且，3.5mm的輸入端口可以連接任何可以聯機輸出的裝置，如MP3播放器或手機，不管是儲存還是在線收聽都十分快捷。

最先進的設計

許多“兼容”CD播放器採用了源於電腦光驅傳動裝置（也稱為轉盤），質量欠佳的CD/DVD-ROM，而651C充分利用我們定制的純音頻CD轉盤。與新式S3自定義CD伺服相結合後能帶來雙重益處，即無差錯的CD數據讀取，並消除時基誤差。因此，651C能毫不失真地播放出CD上的音樂，創造出要可比擬的高保真體驗。

令人難以置信的表現

651C使用了一對雙差分配置的高保真DAC（數位模擬轉換器），所以能確保輸出的高精度。每個聲道都有專用DAC來處理訊息以獲得完美的成像效果。DAC的前部面板上也裝有易於選擇的數位濾波器，上面有兩項設置能讓用戶根據自己的喜好設定聲音。



Azur 651A Integrated Amplifier

Power Output	75 watts (into 8Ω)
S/N ratio (ref 1w)	>92dB (unweighted)
Max. Power Consumption	600W
Standby Power Consumption	<1W @ rated mains
USB	USB Audio 1.0 16 bit 32kHz, 44.1kHz, 48kHz.
Dimensions (HWD)	120 x 430 x 350mm
Weight	8.4kg



Azur 651C CD player

D/A Converters	Dual Wolfson Microelectronics WM8742 24-bit/192kHz capable
Max. Power Consumption	25W
Standby Power Consumption	<1W
Dimensions (HWD)	85 x 430 x 305mm
Weight	4.8kg

設計師摘記



“我們不僅僅是依靠數據表，我親自試聽了六台最受推崇的音頻DAC，然後才為651C選擇了Wolfson WM8742，這使651C的音樂純淨度和動感更勝一籌”

Chris Woolrych –
電子工程師、651系列設計師

Azur 740A Integrated Amplifier

Power Output	100W RMS into 8 Ohms 150W RMS into 4 Ohms
Frequency Response	10 Hz - 50 kHz +/- 1 dB
Signal to Noise Ratio	>96dB (ref 1W/8 Ohm)
Max. Power Consumption	750W
Min. Power Consumption	Active (no signal) 45W Standby 6W
Dimensions (HWD)	115 x 430 x 350mm
Weight	10.7kg (23.5Lbs)

Azur 740C CD player

D/A Converters	Dual Wolfson WM8740 24-bit DACs
Frequency Response	20Hz to 20kHz (+/-0.1dB)
Digital input word widths supported	16 - 24-bit
Digital output word widths supported	16, 20, 24-bit
Digital input sampling frequencies supported	32, 44.1, 48, 88.2, 96, 176.4, 192kHz
Digital output sampling frequencies supported	32 - 192kHz pass through (Including 44.1kHz for CD) Fixed 24-bit, 384kHz
Audio output up-sampling	
Dimensions (HWD)	115 x 430 x 315mm
Weight	6.4kg (14.1lbs)



Cambridge Audio

『最簡單直接、最物超所值的設計概念』



Topaz CD10 CD player

Features:

- Wolfson 8761 DAC (Digital to Analogue Converter)
- CD, MP3 and WMA playback from suitably encoded discs
- Analogue and S/PDIF digital outputs
- Full remote control

Specifications:

Supported disc formats	CD-DA/CD-R/CD-RW/CD-ROM MP3/MP3 Pro/WMA
Max. Power Consumption	15W
Dimensions (HWD)	430 x 80 x 310 mm
Weight	4.3kg



Topaz AM10 Integrated Amplifier

Features:

- 35 Watts per channel
- 5 x rear mounted source inputs
- 1 x front MP3 line input
- Integrated phono stage for turntable connection
- Full remote control

Specifications:

Power Output	35 watts (into 8 Ohms)
Frequency Response	(-3dB) 5Hz - 50kHz
Dimensions (HWD)	76 x 430 x 340mm
Weight	5.6kg



Topaz SR10 FM/AM Stereo Receiver

Features:

- 85 Watts per channel
- 4 x rear mounted source inputs
- FM/AM RDS tuner with 30 presets
- 1 x front input for iPod or MP3
- Integrated phono stage for turntable connection
- Twin speaker outputs
- Full remote control

Specifications:

Power Output	85 watts (into 8 Ohms)
Frequency Response	(-1dB) 5Hz - 50kHz
Dimensions (HWD)	110 x 430 x 340mm
Weight	8.1kg

One+ integrated CD player & DAB+/FM 2.1 receiver system



Cambridge Audio



Power Output	25 watts (into 8Ω) 30 watts (into 6Ω)
Inputs	2 x line level phono input (Aux1, Aux2) (back panel) 1 x MP3 line level input (3.5mm jack) connects to AUX1 input (front panel) F type aerial socket for DAB+ and FM (supplied with antenna fitted)
Outputs	1 x tape output (back panel) 1 x sub out (back panel) Headphone output 3.5mm jack (front panel) 4mm banana sockets left and right speaker outputs (back panel) Dedicated 9 pin socket for DD30 iPod dock (back panel)
Frequency Response	5Hz - 20kHz ± 0.5dB
FM Bands	87.5 - 108 MHz
CD/SD/USB	CD-DA/MP3/WMA/LPCM
File Formats	FAT16/FAT32
Standby Power Consumption	<2W
Max. Power Consumption	150W
Dimensions (HWD)	85 x 215 x 335mm
Weight	4.6kg



動磁與動圈唱機的對比...

551P 用於動磁唱機經濟型現代唱盤機通常安裝有此類型的唱頭（有時也稱為“唱針”）。

651P 使用了複雜精密的電路設計以配合現代唱盤機中最常用的兩種唱機唱頭：

動磁（MM）和動圈（MC）唱頭。

651P 的設計旨在重現黑膠片音溝的 HI-FI 真實感，它是我們性價比最高，音質表現強化能力最強的產品之一。



此簡表中列出唱機前級擴大機支援的唱頭類型

MM = 動磁唱頭
MC = 動圈唱頭

	MM	MC
551P	v	x
651P	v	v



Azur 551P
phono pre-amplifier



Azur 651P
audiophile phono pre-amplifier

Max power consumption	5W	5W
Gain @ 1kHz	39dB	55dB
Input impedance	47kΩ	100kΩ
Input capacitance	220pF	220pF
Nominal output	300mV	300mV
Sensitivity for nominal output	3.35mV	0.5mV
Overload margin	>30dB	>30dB
THD 20Hz - 20kHz	<0.005%	<0.002%
RIAA curve accuracy	< +/-0.3dB 20Hz-50kHz (subsonic filter off)	< +/-0.3dB 20Hz-50kHz
Signal to noise ratio (using Audio Precision RIAA-1 with grounded inputs)	>86dB	>72dB
Crosstalk @ 20kHz	>83dB	>69dB
Dimensions (H x W x D)	46 x 215 x 133mm	46 x 215 x 133mm
Weight	0.9kg	0.9kg



Minx 系列產品.....

Min11

Min11只有8公分大小的正方形，但由於其最新的BMR喇叭單體，使它產生的力量和精緻度與它的大小不成比擬。

Min21

採用與Min11相同的BMR喇叭單體，並增加了一個專用的驅動器程序，改善了低音處理和提供出色的音頻性能。

X200

X200僅有20(9")cm2大小，是世界上最小的低音炮，非常容易放置。和Minx其它所有類型的低音炮一樣，有多種簡單控制方法，幾乎可以放置在任何地方。

cm

35.5

33

30.5

28

25.5

23

20.5

18

15.5

13

10.5



所有的Minx超重低音炮都提供了簡易的播放連接和設置

頻率響應

130Hz-20kHz

額定功率

推薦15-50W

喇叭

1 x 2.25" BMR

尺寸 (高x寬x深)

78 x 78 x 85mm

重量

0.43kg

外觀

高亮光黑色
高亮光白色

頻率響應

130Hz-20kHz

額定功率

推薦15-75W

喇叭

2 x 2.25" BMR

尺寸 (高x寬x深)

154 x 78 x 85mm

重量

0.75kg

外觀

高亮光黑色
高亮光白色

輸出功率

200W rms

喇叭

1 x 6.5" 低音喇叭

2 x 6.5" 被動輻射器

尺寸 (高x寬x深)

219 x 210 x 222mm

重量

5.0kg

外觀

高亮光黑色
高亮光白色



X300

X300衝擊和低音效果更強，不僅有300W的數位功放，還有更大的驅動。撇開技術優勢不談，X300只有28(12")cm²，比常用的低音炮小得多，就足以令人驚訝！

X500

X500裝有一個碩大的500W擴大器和一個10英寸陽極氧化鋁低音喇叭及ABR喇叭，保證家庭劇院擁有發燒友所期待的音質。您一定會以為需要更大的設備才能達到這樣的房間環繞效果，其實跟整個Minx家族一樣，X500非常小巧，可以任意定位，安裝方便。



Inches

14"
13"
12"
11"
10"
9"
8"
7"
6"
5"
4"
3"
2"
1"

輸出功率	300W rms
喇叭	1 x 8" 低音喇叭 1 x 8" 被動輻射器
尺寸 (高x寬x深)	311 x 266 x 278mm
重量	7.5kg
外觀	高亮光黑色 高亮光白色

輸出功率	500W rms
喇叭	1 x 10" 低音喇叭 1 x 10" 被動輻射器
尺寸 (高x寬x深)	365 x 320 x 350mm
重量	11.7kg
外觀	高亮光黑色 高亮光白色

Min 配件

Minx 衛星式喇叭可以是站在檯面上，也可以裝在牆上。滿足每個家庭不同，我們有各種流線型的配件，滿足您的安裝需求。



600D 桌上型腳架

顏色亮麗的拉絲鋁製桌上型支架可以立即安裝，保證 Minx 能夠分開放在櫥櫃或電視櫃旁。

400M 旋轉壁掛型支架

可以任意調整角度，是 Minx 最便捷的安裝方式。



600P 調整型落地腳架

用高光噴漆的鋼和鋼化玻璃 UV 黏貼而成，這款漂亮的腳架有黑色和白色兩款並具有整合電纜功能，使裝置雅觀大方。





WS30 slimline on-wall speaker

靈敏度	88dB @1m/2.83V
頻率響應	72Hz - 20kHz
平均阻抗	4-8 Ohms
喇叭	Tweeter: 1 x 25mm (1") Woofer: 1 x 115mm (4.5") mid/bass driver
承受功率	15 -100W
尺寸 (高 x 寬 x 深)	370 x 260x 87mm
重量	3.4kg

S-Series

Model	S20	S30	S50	S70	S90 / SL90
承受功率	80 watts	100 watts	80 watts	120 watts	輸出 功率 70 watts
喇叭	1 x 9cm (3.5") mid/bass driver 1 x 2.5cm (1") tweeter	1 x 11.5cm (4.5") mid/bass driver 1 x 2.5cm (1") tweeter	2 x 9cm (3.5") mid/bass drivers 1 x 2.5cm (1") tweeter	2 x 13cm (5") mid/bass drivers 1 x 2.5cm (1") tweeter	20cm (8") long throw woofer
平均阻抗	4 – 8 Ohms	4 – 8 Ohms	4 – 8 Ohms	4 – 8 Ohms	N/A
頻率響應	80Hz – 20 kHz	55Hz – 20kHz	80Hz – 20kHz	39Hz – 20kHz	35 – 180Hz
Crossover	2 Way 1st Order	2 Way 1st Order	2 Way 2nd Order	2.5 Way 2nd Order	Active
防磁	Yes	Yes	Yes	Yes	To within 100mm of product
尺寸 (高 x 寬 x 深)	198 x 129 x 179mm	226 x 160 x 235mm	117 x 430 x 220mm	938 x 160 x 240mm	300 x 300 x 335mm
重量	2.1kg	3.75kg	4.7kg	12.4kg	10.7kg



S20 書架揚聲器

身材矮小的 S20，它的敏捷和力量大家都不陌生。其提供一個美妙清脆的高音和令人驚訝的深層低音。這些利落的顯示器是十分理想的，當設置在較小的房間或作為家庭影院的設置的一部分去匹配 S 系列的重低音。



S30 書架揚聲器

S30 像是一個啟示，當它被導入並得到世界高傳真新聞界的稱讚，包括 WhatHi-Fi? Sound and Version (英國) 和 Stereo (德國) 都給予五星評價。以一個 4.5 “複合式編織的單體去控制 100 瓦，並提供了一個強大且受控制的低音表現，同時提供極低的失真。這是匹配的軟球頂高音，其特色是鈹喇叭單體與最先進的電機系統，並裝配一個出色的音圈。



S50 專業的中央揚聲器

可以應付家庭劇院系統的苛刻需求。S50 是被音色相襯的其他 S 系列音箱包圍並產生自然的環繞音效體驗。這也意味著它是防磁，無干擾的，可以被放在任何屏幕下方。



S70 落地式揚聲器

結合了優秀的高音和居高臨下的低音，呈現出優異的音質。S70 有個詳盡和逼真的軟球頂高音，還擁有兩個令人印象深刻的中/低音單體，可驅動強大的低頻。優雅的外觀給予最大的剛性，而尖的底座提供一流的穩定。S70 有鍍金三路雙向接線端子和磁屏蔽以便於安置。



What Hi-Fi? Sound and Vision recommends...



S90 重低音喇叭

重低音揚聲器是 S 系列的完美補充。小巧和獨立的外表隱藏一個令人印象深刻的低音輸出 - 向下到 35Hz。它具有自動開/關，因此，當檢測到信號，它才會啟動。為完善系統的整合，分頻點可以根據正在使用的前置揚聲器調整，同時感謝 5.1 聲道的輸入控制，令它可以通過 AV 接收機執行低音管理的功能。





Technology



Aspirated Tweeter Technology (ATT)

Mordaunt-Short uses an advanced aluminium dome tweeter which the company has been perfecting for over 20 years.




CPC aluminium cone technology

Continuous Profile Cone (CPC) technology produces predictable driver performance by ensuring controlled piston-like movement at low frequencies and minimal break up at higher frequencies. Lightweight yet rigid anodised aluminium cones are used for faithful dynamics.

1. ATT tweeter with 25mm aluminium dome for the most revealing high frequencies
2. Easily removable magnetic grilles sit flush against the baffle for the perfect fit
3. Rubber isolate mounted tweeter which enables it to float free from the cabinet
4. Internal wadding for critical damping of standing waves
5. Internally partitioned for a 2½ way design which means one driver deals solely with low end frequencies
6. Sound deadened driver baskets which completely eliminate unwanted resonance effects
7. Cabinet and driver bracing for ultimate rigidity and support
8. Simple crossover design for cleaner signal path. Isolate mounted to reduce distortion
9. Custom designed biwireable bullet terminals for optimal connection
10. Curved cabinet design to reduce standing waves
11. Custom designed feet for hard/wood flooring and spikes for carpeted interiors
12. X-Squared curved port flare termination for smooth air dispersion
13. Twin latest generation 6½" CPC drivers for a commanding and expansive sound stage

What's inside

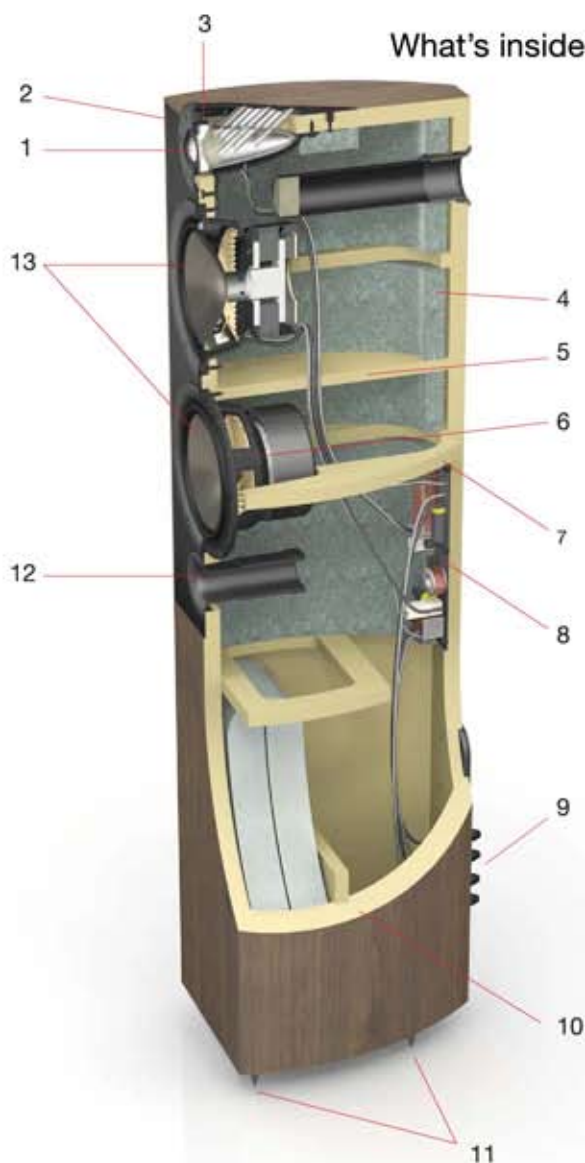

The Mezzo range is designed to exacting standards to produce the ultimate performance with both music and movies.

Specifications



Mezzo 1

靈敏度 88dB

頻率響應 55Hz – 22kHz

平均阻抗 4-8 Ohms

喇叭

(1) 133mm/5.25" aluminium
CPC mid/bass driver
(1) 25mm/1" ATT aluminium
dome tweeter

Crossover

2nd order with DVP

承受功率 15 – 100 W

防磁 Yes

尺寸 (高x寬x深)

300 x 204 x 255mm

重量 6.2kg



Mezzo 2

靈敏度 89dB

頻率響應 48Hz – 22kHz

平均阻抗 4-8 Ohms

(1) 165mm/6.5" aluminium
CPC mid/bass driver
(1) 25mm/1" ATT aluminium
dome tweeter

2nd order with DVP

15 – 120 W

Yes

352 x 220 x 280mm

8.0kg



Mezzo 5

靈敏度 89dB

頻率響應 60Hz – 22kHz

平均阻抗 4-8 Ohms

(2) 133mm/5.25" aluminium
CPC mid/bass drivers
(1) 25mm/1" ATT aluminium
dome tweeter

2nd order with DVP

15 – 120 W

Yes

175 x 491 x 251mm

8.8kg



Mezzo 6

靈敏度 89dB

頻率響應 38Hz – 22kHz

平均阻抗 4-8 Ohms

(2) 165mm/6.5" aluminium
CPC mid/bass drivers
(1) 25mm/1" ATT aluminium
dome tweeter

2nd order with DVP

15 – 150 W

Yes

1000 x 220 x 280mm

20kg



Mezzo 8

靈敏度 89dB

頻率響應 35Hz - 22kHz

平均阻抗 4-8 ohms

(2) 165mm/6.5" aluminium
CPC bass driver
(1) 133mm/5.25" aluminium
CPC mid-driver
(1) 25mm/1" ATT aluminium
dome tweeter

2nd order with DVP

15-200 W

Yes

1072 x 220 x 307mm

23.8kg



Mezzo 9

Max input 2V RMS

30Hz – 200Hz

輸入阻抗 10k Ohms

(2) 203mm/8" aluminium
CPC long throw woofers

Active/variable

600W

輸出功率 375W Active

Yes

315 x 338 x 350mm

21.1kg



Aviano 6

承受功率	15-150 Watts
靈敏度	88db
頻率響應	38Hz – 22kHz
喇叭	(2) 165mm/6.5" aluminium CPC mid/bass (1) 25mm/1" aluminium dome tweeter
阻抗	4-8 Ohms
尺寸 (高寬深)	950 x 205 x 298 mm
重量	17.3kg

Aviano 8

承受功率	15-200 Watts
靈敏度	88db
頻率響應	35Hz – 22kHz
喇叭	(2) 165mm/6.5" CPC aluminium bass driver (1) 165mm/6.5" aluminium CPC mid driver (1) 25mm/1" aluminium dome tweeter
阻抗	4-8 Ohms
尺寸 (高寬深)	980 x 205 x 320 mm
重量	20.5kg

Aviano 1

承受功率	15-100 Watts
靈敏度	88db
頻率響應	55Hz – 22kHz
喇叭	(1) 130mm/5.25" aluminium CPC mid/bass (1) 25mm/1" aluminium dome tweeter
阻抗	4-8 Ohms
尺寸 (高寬深)	275 x 179 x 267 mm
重量	5kg

Aviano 5

承受功率	15-120 Watts
靈敏度	89db
頻率響應	70Hz – 22kHz
喇叭	(2) 5.25" CPC aluminium mid/bass (1) 1" aluminium dome tweeter
阻抗	4-8 Ohms
尺寸 (高寬深)	179 x 456 x 229 mm
重量	7.5kg

Aviano 9

輸出功率	300 Watts active
頻率響應	30Hz – 200Hz
喇叭	(1) 305mm/12" long throw woofer
尺寸 (高寬深)	471 x 360 x 508 mm
重量	28kg



Aviano 2

承受功率	15-120 Watts
靈敏度	88db
頻率響應	45Hz – 22kHz
喇叭	(1) 165mm/6.5" aluminium CPC mid/bass (1) 25mm/1" aluminium dome tweeter
阻抗	4-8 Ohms
尺寸 (高寬深)	320 x 205 x 298 mm
重量	6kg



Alumni 2

承受功率	15-80 Watts
喇叭	(1) 89mm/3.5" aluminium CPC mid/bass (1) 25mm/1" aluminium dome tweeter
阻抗	4-8 ohms
頻率響應	100Hz-20kHz
尺寸 (高寬深)	176 x 108 x 145mm
重量	2kg



Alumni 3

承受功率	15-80 Watts
喇叭	(4) 89mm/3.5" aluminium CPC mid/bass (3) 25mm/1" aluminium dome tweeter
阻抗	4-8 ohms
頻率響應	100Hz-20kHz
尺寸 (高寬深)	800 x 128 x 110mm
重量	6.3kg



Alumni 5

承受功率	15-80 Watts
喇叭	(2) 89mm/3.5" aluminium CPC mid/bass (1) 25mm/1" aluminium dome tweeter
阻抗	4-8 ohms
頻率響應	100Hz-20kHz
尺寸 (高寬深)	108 x 274 x 145mm
重量	3kg



Alumni 8

承受功率	15-100 Watts
喇叭	(2) 3.5" long-throw neodymium CPC woofer (1) 1" tweeter (4) Passive ABR
阻抗	4-8 ohms
頻率響應	49Hz-20kHz
尺寸 (高寬深)	800 x 118 x 122mm
重量	4.5kg



Alumni 9

輸出功率	120 Watts
喇叭	203mm/8" Long throw CPC woofer
頻率響應	35Hz - 200Hz
尺寸 (高寬深)	376 x 260 x 354mm



Alumni stands

高	976mm
寬	220mm
深	300mm
重量	2.3kg





GENIE



另有 400P 腳架可選購

402 satellite

靈敏度	86dB
頻率響應	95Hz – 20kHz
阻抗	4 – 8 Ohms
喇叭	102mm (4") aluminium 2nd generation CPC woofer, 25mm (1") aluminium dome tweeter
承受功率	15 – 100 watts
尺寸 (高寬深)	223 x 132 x 170mm
重量	1.8Kg

404 centre

靈敏度	87dB
頻率響應	95Hz – 20kHz
阻抗	4 – 8 Ohms
喇叭	2 x 89mm (3.5") aluminium 2nd generation CPC woofers, 25mm (1") aluminium dome tweeter
承受功率	15 – 100 watts
尺寸 (高寬深)	302 x 134 x 160mm
重量	2.1Kg

Looking for the perfect package?

carnival



Carnival 8



Carnival 6



Carnival 5



Carnival 2

承受功率	150 watts	120 watts	80 watts	100 watts
喇叭	2 x 16.5cm (6.5") mid / bass drivers 1 x 2.5cm (1") tweeter	2 x 14cm (5.5") mid / bass drivers 1 x 2.5cm (1") tweeter	2 x 9cm (3.5") mid / bass drivers 1 x 2.5cm (1") tweeter	1 x 14cm (5.5") mid / bass drivers 1 x 2.5cm (1") tweeter
阻抗	4 – 8 Ohms	4 – 8 Ohms	4 – 8 Ohms	4 – 8 Ohms
頻率響應	34Hz – 20kHz	39Hz – 20kHz	80Hz – 20kHz	55Hz – 20kHz
尺寸 (高寬深)	1005 x 200 x 290mm	910 x 177 x 240mm	118 x 430 x 180mm	320 x 160 x 219mm
重量	18kg	12kg	4.7kg	4.75kg



Finishes Cherry



ACTIVE SUBWOOFER DQ-R30

喇叭單體	12英吋長衝程低音單體
音箱設計	低音反射式
額定輸出功率	RMS 120W
頻率響應	25Hz—120Hz
分頻點	40Hz—120Hz/24dB oct
BASS EQ 調整	50Hz, 0 ± 12dBz
最大功率	330W
尺寸(高×寬×深)	420×360×360mm
重量	22kg



ACTIVE SUBWOOFER DQ-R20

喇叭單體	8英吋長衝程低音單體
音箱設計	低音反射式
額定輸出功率	RMS 120W
頻率響應	25Hz—120Hz
分頻點	40Hz—120Hz/24dB oct
BASS EQ 調整	50Hz, 0 ± 12dBz
最大功率	330W
尺寸(高×寬×深)	371×250×315mm
重量	12.8kg

WALL MOUNTED SPEAKER




ON-WALL DQ-8.2

阻抗	8Ω	DQ-6.2	8Ω	DQ-5.3	8Ω
承受功率	40~150W	40~120W	20~120W		
頻率響應	35Hz~20kHz	45Hz~20kHz	45Hz~20kHz		
靈敏度	90dB	90dB	90dB		
尺寸(高寬深)	359×225×109mm	306×220×85mm	395×190×80mm		
安裝模板尺寸	326×226mm	276×190mm	365×160mm		

DQ-K100 KARA OK SPEAKER

阻抗	8Ω
承受功率	30 - 180W
頻率響應	32Hz—22kHz
尺寸(高×寬×深)	300×510×270mm
重量	10kg
★ 10吋超高效率低音單體	
★ 麥克風回授保護線路	

minX

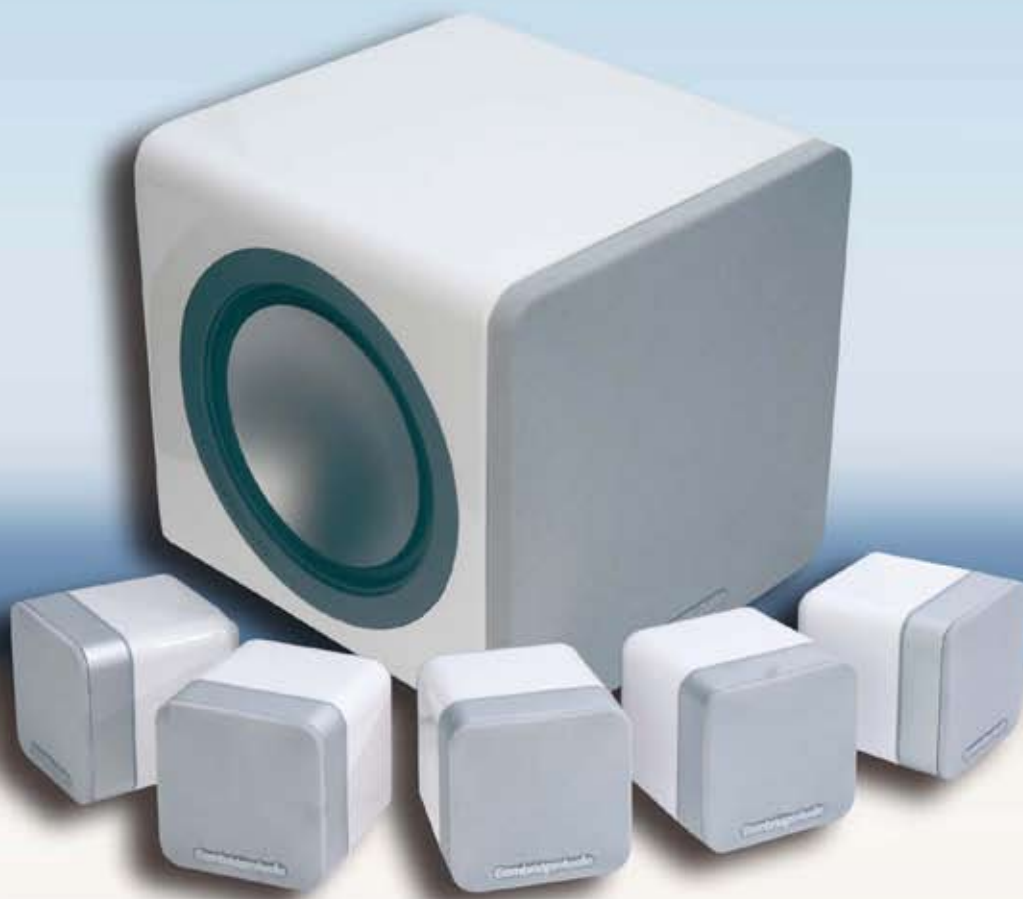

Hearing is believing...

經銷商蓋章

Cambridge Audio

MORDAUNT-SHORT

DynaQuest

以上LOGO是各公司註冊之商標並授權台灣總代理——竹記貿易股份有限公司使用。
產品的設計、規格與可用性之變更，恕不另行通知。
所有產品顏色、配件皆以實物為主、印刷錯誤恕難負責。

竹記貿易股份有限公司 Trukey Trading Corp.

台北市北寧路58號 台北：02-25780678 台中：04-23801974 台南：06-3366814 高雄：07-8221911



www.trukey.com.tw