

M E L
B Y
E

RAYCORE

Q3-S232 V2.1E

Specification of Fiber Media Converter,
non-Managed

Part Number: AMCN-WT5x-xx1Ax-00



With Fiber Tray

The Fiber Media Converter is five 10/100/1000 Base-T Gigabit Ethernet and one 100/1000 Base-X non-managed stand-alone converter.

To ensure a flexible installation, the converter can be supplied with a fiber handling tray.

Specifications

Interface

- **LAN**
 - RJ-45 Port: 10/100/1000 Base-T x4 Port
 - RJ-45 Port: 10/100/1000 Base-T TM Port (TM: Telemetry services)
- **WAN**
 - Fiber Port: Twin-Rate 100/1000 Base-X 1x9 Dual or Bidi SC connector
 - Fiber Length: Dual-Type: 20km/40km (SMF); Bidi-Type: 20km/40km (SMF)

Standard compliance

- Support IEEE 802.3 10BASE-T
- Support IEEE 802.3u 100BASE-TX/FX
- Support IEEE 802.3ab 1000BASE-T
- Support IEEE 802.3z 1000BASE-X
- Support IEEE 802.3x Flow Control



Hardware

- LED Indicators:
 - Power x1: Blue LED
 - FX LINK/ACT x1: Blue LED
 - FX Speed x1: Orange/Green LED (1000M/100M)
 - LAN 1-4 LINK/ACT x4: Blue LED
 - LAN 1-4 Speed x4: Orange/Green/Off LED (1000M/100M/10M)
 - TM LINK/ACT x1: Blue LED
- Support Auto-negotiation for TP Port (10M/100M/1000M and Full/Half mode)
- Support Auto MDI/MDIX auto-crossover for TP ports
- Operate in store and forward mode
- Support Flow Control (default: disable)
- Support 1K MAC Address Table
- Support 1.6K bytes Frame size

Environmental & Physical


- Installation: Desk Top/Wall Mounting
- Dimension: 180mm x 90mm x 44.5mm (LxWxH) (with fiber tray)
- Operating Temperature: 0~50°C
- Storage Temperature: 0~70°C
- Humidity: 20~80% non-condensing
- Power Consumption: <6.5W
- Power Input: DC Jack, 12VDC/1A
- MTBF: 100,000 h (25°C)
- Compliance: RoHS
- Certification: CE

Ordering Information

Part Number	Description
AMCN-WT5x-xx1Ax-00	Fiber Media Converter, non-Managed, 10/100/1000 Base-T x5 Port – 100/1000 Base-X x1 Port Series



M E L
B Y
E

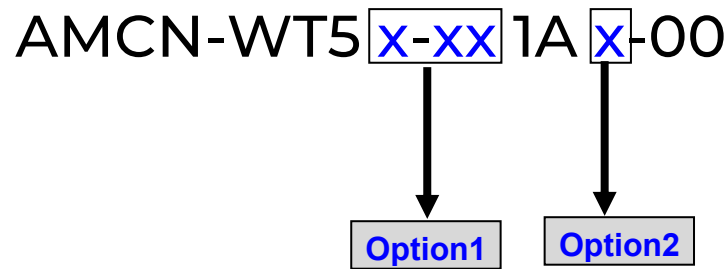

Option1:

Option Code	Option Descriptions
M-13	1x9 Dual SC, 1310nm SMF 20km
D-13	1x9 Dual SC, 1310nm SMF 40km
M-35	1x9 Bidi SC, T1310nm/R1550nm SMF 20km
D-35	1x9 Bidi SC, T1310nm/R1550nm SMF 40km

Option2:

Option Code	Option Descriptions
1	100-240V/50-60Hz, 12V/1A, US (Type A), Black
2	100-240V/50-60Hz, 12V/1A, EU (Type C), White
3	100-240V/50-60Hz, 12V/1A, EU (Type C), Black

