



LGX Chassis carry out the complete solution of cable management. The modules enable to integrate fiber splitter/WDM or any other components for a better field installation. With mounted adaptors, LGX chassis are rack mountable and compliant with 4U chassis for standard 19" rack setup.

Features

- Supports standard 19" 4U high rack-mount chassis with 12 slots for LGX Modules.
- 21-inch and 19-inch rack mount.
- The unit will fit in both 21" ETSI standard and Electronic Industries Association (EIA) standard compliant racks.
- For different type LGX box module (1x2 Coupler, FWDM, CWDM, DWDM)
- Available with 1xN and 2xN Configuration
- Operating temp range -0~50°C


Applications

- FTTx solution
- CATV Network solution





Drawing

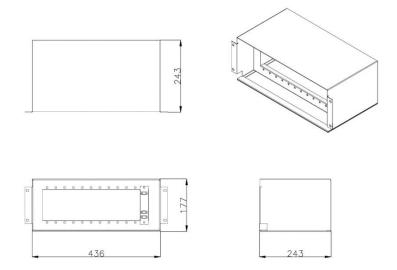

RC-LGXCH: without windows

Ordering Information:

Part Number	Description
ACHL-1200-00000-00	4RU LGX Chassis for 12 slots without windows

