

SMALL MIRROR CAMERA WITH BRACKET & OSD




FEATURES

- Patent: The design of CCTV Camera behind the Mirror without pinhole on the surface
- Special Coating Technology
- Patent: OSD Function operated by Cable or Remote Control (optional) (Adjust the parameters of camera easily!)
- Apply to ATM machine, Bank, Counter, Bus, Car
- 1/3" Sony Super HAD II CCD Sensor

SPECIFICATION

| Model No. | CMXSH/M |
|-----------------------|-------------------------------------------------------------|
| Built-In Lens | 4.3mm (Available for 6, 8, 12, 16mm Lens) |
| Color CCD | 1/3" Sony Super HAD II Color CCD Sensor |
| Lens Angle | 78° |
| System | NTSC / PAL |
| SYNC System | Internal |
| Number of Pixel | NTSC : 811 (H) x 508 (V) PAL : 795 (H) x 596 (V) |
| Resolution | 600 TV Lines |
| Minimum Illumination | 0.1 Lux |
| S / N Ratio | More than 48dB |
| Electronic Shutter | 1/60 (50) to 1 / 100,000 sec. |
| Gamma Correction | 0.45 |
| White Balance | Auto (ATW) |
| AGC | Automatic |
| BLC | Automatic (64 area set up by OSD) |
| Current Consumption | 80 mA±10% |
| Working Voltage | DC 12V |
| Video Output | 1.0 Vp-p Composite, 75Ω |
| Operation Temperature | -10°C ~ 60°C , Storage: -30°C ~ 70°C |

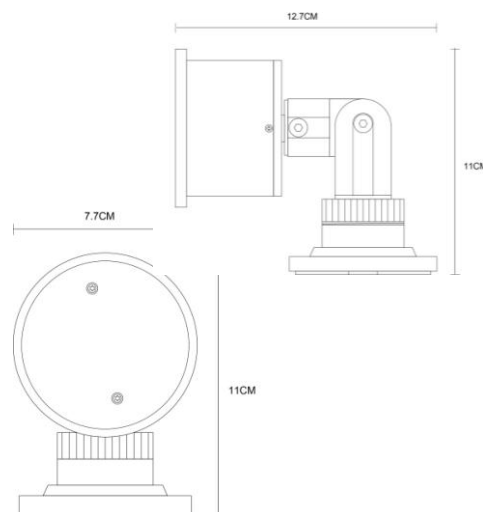

➤ Designs and specifications are subject to change without notice.